




# Feedthrough Connector Modules


Feedthrough modules provide low-cost and compact field wiring screw termination solutions for quickly connecting ZIPLink cables with PLCs. Modules mount on 35 mm DIN rail part #DN-R35S1.



ZL-RTB20

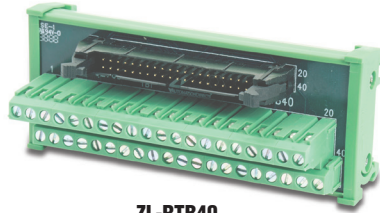

ZL-RTB40

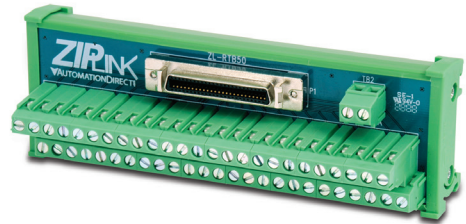

ZL-RTB50

Specifications												
Feedthrough Modules	Part #	Pcs/Pkg	Price/Pkg	Weight (lbs)	Part #	Pcs/Pkg	Part #	Weight (lbs)	Part #	Pcs/Pkg	Price/Pkg	Weight (lbs)
	ZL-RTB20	1	\$20.00	0.26	ZL-RTB40	1	\$33.50	0.22	ZL-RTB50	1	\$45.50	0.33
<b>Description * * * *</b>	20-Pole Feedthrough Connector Module				40-Pole Feedthrough Connector Module				50-Pole Connector Module for interfacing SureServo I/O to a controller			
<b>Maximum Voltage</b>	300VAC/VDC				36VAC/VDC				0-30VDC * *			
<b>UL Voltage Rating</b>	0-250VAC/VDC				0-30VAC/VDC * *				24VDC			
<b>Maximum Current per Circuit</b>	2A				500mA				0.2A			
<b>Maximum Current per Common Circuit</b>	4A *				N/A				N/A			
<b>Maximum Current per Module</b>	40A (all conductors combined including commons)				32A (all conductors combined including commons)				10A			
<b>Number of Terminal Block Positions</b>	20				40				50			
<b>Surrounding Temperature Range</b>	32 to 140°F (0 to 60°C)											
<b>Approvals</b>	File # E200031 UL, cUL, Class 1, Division 2, Groups A,B,C,D Hazardous Locations, CE, EN 61131-2:2007											
<b>Terminal Block Contacts</b>	Copper alloy, tin-lead plated											
<b>Wire Range (Rated Cross Section) * * *</b>	12-24AWG Solid or Stranded Copper Conductor (2.5mm <sup>2</sup> )											
<b>Wire Strip Length</b>	0.24-0.27" (6-7mm)											
<b>Screw Torque</b>	4.4 in-lbs (0.5 Nm)											
<b>Connector Type</b>	Molex Micro-Fit 3.0, 24 pin connector Example: Receptacle 43020-2400 Pins 43031 Series, Male				3M 34000 Series IDC Connector, strain relief is required to latch to header. Example: Socket 3417-7640, Strain relief 3448-3040				3M mini DELTA Ribbon (MDR), 101 Series, 50 pin Example: Plug 10150 - 3000VE, Shell 10350 - 52A0 - 008			
<b>Connecting Cables (Sold Separately)</b>	See Wiring Selection Guides at the beginning of this section. See Connection Cable specifications tables at the end of this section.				See Wiring Selection Guides at the beginning of this section. See Connection Cable specifications tables at the end of this section.				ZL-SVC-CBL50 (0.5m/1.6ft) ZL-SVC-CBL50-1 (1m/3.3ft) ZL-SVC-CBL50-2 (2m/6.6ft) See Connection Cable specifications tables at the end of this section.			
<b>Dimensions (WxHxD)</b>	2.64" x 3.42" x 2.03" (67.0mm x 86.8mm x 51.6mm)				4.48" x 1.89" x 1.84" (113.7mm x 48.1mm x 46.8mm)				5.46" x 1.89" x 1.84" (138.6mm x 48.1mm x 46.8mm)			
<b>Cable/Wire Clearance</b>	0.5" (12.7mm) Required											
<b>Mounting Restrictions</b>	None											

\* The 4 common circuits are at terminal block positions 1, 6, 11, and 16. Each common circuit has 2 cable wires per terminal.

\*\* Use Class 2 power supply

\*\*\* Use conductors rated 60°/75°C

\*\*\*\* Connecting cables are for internal wiring only.

Note: See wiring details and dimensional drawings on our Web site at:

<http://www.automationdirect.com/static/manuals/ziplinks/ziplinks.html>

Company Information

Terminal Blocks

Power Distribution Blocks

Wiring Accessories

ZIPLink Connection System

Multi-wire Connectors

Sensor Cables and Connectors

M12 Junction Blocks

Panel Interface Connectors

Wiring Duct

Cable Ties

Wire

Bulk Multi-conductor Cables

Wire Management Products

Power Supplies

DC Converters

Transformers and Filters

Circuit Protection

Tools

Test Equipment

Enclosures

Enclosure Climate Control

Safety: Electrical Components

Safety: Protective Wear

Terms and Conditions



# Accessories

## Replacement Relays

Replacement relays are offered with a 24VDC coil or 120VAC coil and are for use with the ZIPLink relay modules.

Sold in packages of 4.



**ZL-RELAY-24X4**  
\$12.00



**ZL-RELAY-120X4**  
\$17.00

24VDC Relay Specifications			
Contact		Coil	
<b>Current Rating</b>	30VDC @ 10A 250VAC @ 8A General Use	<b>Input Voltage Range</b>	24VDC (-20%/+30%)
<b>Contact Type</b>	1 Form C (SPDT)	<b>Maximum Continuous Coil Voltage</b>	31.2VDC
<b>Contact Voltage (per point)</b>	250VAC/30VDC	<b>Rated Current per Coil</b>	16.7mA (±10%) @ 24 VDC
<b>Maximum Power Inductive</b>	2000VA General Use	<b>Coil Resistance</b>	1440Ω (±10%)
<b>Maximum Power Resistive</b>	AC 2000VA, DC 300W	<b>Power Consumption per Coil</b>	0.4W
<b>Maximum Switching Voltage</b>	250VAC, 110VDC	<b>Pick Up Current Max. per Coil</b>	15mA
<b>Minimum Load</b>	10mA @ 5VDC	<b>Drop-Out Voltage Min.</b>	1.2VDC
<b>Contact Resistance</b>	100mΩ Max @ 1A, 6VDC	<b>Pick-Up Voltage Max.</b>	19.2VDC
<b>Contact Material</b>	AgNi (Silver Nickel Alloy)	<b>Off to On/On to Off Response Time</b>	12ms/8ms
<b>Contact Material</b>	AgNi (Silver Nickel Alloy)	<b>Weight (lbs)</b>	0.11
120VAC Relay Specifications			
Contact		Coil	
<b>Current Rating</b>	30VDC @ 10A 250VAC @ 8A General Use	<b>Input Voltage Range</b>	115VAC (-20%/+30%), 50-60Hz
<b>Contact Type</b>	1 Form C (SPDT)	<b>Maximum Continuous Coil Voltage</b>	150VAC
<b>Contact Voltage (per point)</b>	250VAC/30VDC	<b>Rated Current per Coil</b>	7.65mA (±10%) @ 115VAC 50Hz 6.30mA (±10%) @ 115VAC 60Hz
<b>Maximum Power Inductive</b>	2000VA General Use	<b>Coil Resistance</b>	8100Ω (±10%)
<b>Maximum Power Resistive</b>	AC 2000VA, DC 300W	<b>Power Consumption per Coil</b>	0.88W @ 50Hz 0.73W @ 60Hz
<b>Maximum Switching Voltage</b>	250VAC, 110VDC	<b>Drop-Out Voltage Min.</b>	34.5VAC
<b>Minimum Load</b>	10mA @ 5VDC	<b>Pick-Up Voltage Max.</b>	92VAC
<b>Contact Resistance</b>	100mΩ Max @ 1A, 6VDC	<b>Off to On/On to Off Response Time</b>	12ms/8ms
<b>Contact Material</b>	AgNi (Silver Nickel Alloy)	<b>Weight (lbs)</b>	0.11


## Installation Accessories

Accessories			
	Part #	Pcs/Pkg	Price/Pkg
<b>DIN Rail</b>	DN-R35S1	10	\$28.00
<b>Angled Support Bracket</b>	DN-ASB1	50	\$49.50
<b>End Bracket</b>	DN-EB35	50	\$39.50




# Module Dimensions


## ZL-RTB20

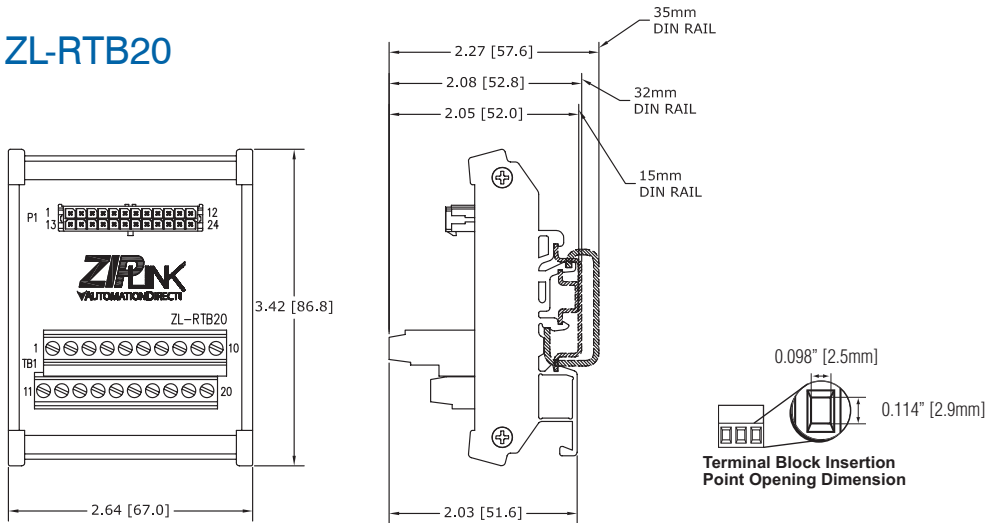

## ZL-RTB40

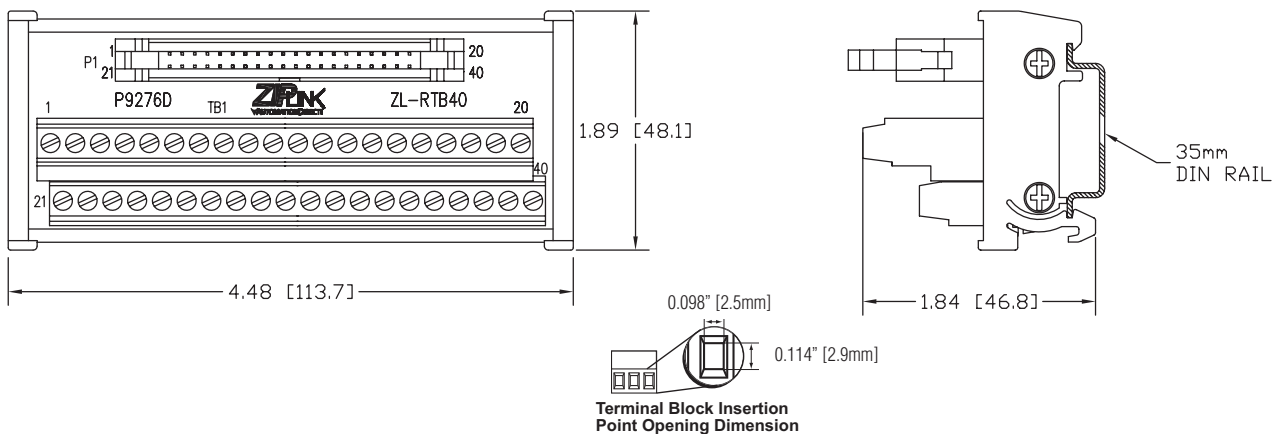

## ZL-RTB50

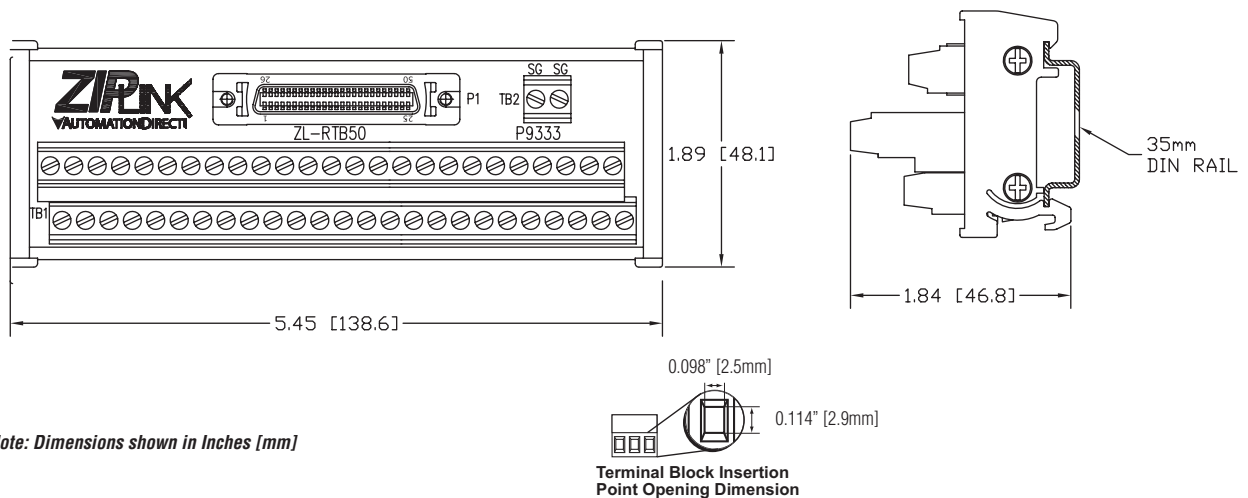

Note: Dimensions shown in Inches [mm]



# PLC I/O Modules to ZIPLink Connector Modules – CLICK



NOTE: IN EACH TABLE BELOW SELECT THE LENGTH OF CABLE BY REPLACING THE \* AS FOLLOWS: (BLANK) = 0.5M, -1 = 1.0M, -2 = 2.0M.

CLICK CPU Module ZIPLink Selector				
CPU Module	# of Terms	ZIPLink		
		Component	Module Part No.	Cable Part No.
CO-00DD1-D	20	Feedthrough	ZL-RTB20	ZL-CO-CBL20 *
CO-00DD2-D				
CO-00DR-D				
CO-00AR-D				
CO-01DD1-D				
CO-01DD2-D				
CO-01DR-D				
CO-01AR-D				
CO-10DD1E-D				
CO-10DD2E-D				
CO-10DRE-D				
CO-10ARE-D				
CO-11DD1E-D				
CO-11DD2E-D				
CO-11DRE-D				
CO-11ARE-D				
CO-02DD1-D	20	No ZIPLinks are available for analog CPU modules.		
CO-02DD2-D				
CO-02DR-D				

CLICK CPU Discrete Output Module ZIPLink Selector				
I/O Module		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
CO-08TD1	11	Feedthrough	ZL-RTB20	ZL-CO-CBL11 *
CO-08TD2				
CO-08TR				
CO-08TA				
CO-16TD1	20	Fuse	ZL-RFU20 <sup>2</sup>	ZL-CO-CBL20 *
		Relay (sinking)	ZL-RRL16-24-1	
CO-16TD2	20	Feedthrough	ZL-RTB20	
		Fuse	ZL-RFU20 <sup>2</sup>	
CO-04TRS <sup>1</sup>	20	Feedthrough	ZL-RTB20	

1 The CO-04TRS relay output is derated not to exceed 2A per point maximum when used with the ZIPLink wiring system.

2 Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits. To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit.

CLICK CPU Discrete Input Module ZIPLink Selector				
I/O Module		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
CO-08ND3	11	Feedthrough	ZL-RTB20	ZL-CO-CBL11 *
CO-08ND3-1				
CO-08NE3				
CO-08NA				
CO-16ND3	20	Sensor	ZL-LTB16-24	ZL-CO-CBL20 *
		Feedthrough	ZL-RTB20	
CO-16NE3	20	Feedthrough	ZL-RTB20	
		Sensor	ZL-LTB16-24	

CLICK CPU Combo I/O Module ZIPLink Selector				
I/O Module		ZIPLink		
Combo Module	# of Terms	Component	Module Part No.	Cable Part No.
CO-16CDD1	20	Feedthrough	ZL-RTB20	ZL-CO-CBL20 *
CO-16CDD2	20		ZL-RTB20	ZL-CO-CBL20 *
CO-08CDR	11		ZL-RTB20	ZL-CO-CBL11 *

CLICK CPU Analog I/O Module ZIPLink Selector				
I/O Module		ZIPLink		
Analog Module	# of Terms	Component	Module Part No.	Cable Part No.
CO-04AD-1	11	Feedthrough	ZL-RTB20	ZL-CO-CBL11 *
CO-04AD-2				
CO-04RTD	20	No ZIPLinks are available for RTD and thermocouple modules.		
CO-04THM	11			
CO-04DA-1	11	Feedthrough	ZL-RTB20	ZL-CO-CBL11 *
CO-04DA-2				ZL-CO-CBL20 *
CO-4AD2DA-1	20			ZL-CO-CBL20 *
CO-4AD2DA-2				



NOTE: ZIPLINK CONNECTOR MODULES SPECIFICATIONS ARE ON THE FOLLOWING PAGES IN THE COMPATIBILITY MATRIX TABLES. ZIPLINK CABLES SPECIFICATIONS ARE AT THE END OF THIS ZIPLINK SECTION.





# PLC I/O Modules to ZIPLink Connector Modules – DL05/06

DL05/06 PLC Input Module ZIPLink Selector				
PLC		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
D0-10ND3	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
D0-10ND3F	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
D0-16ND3	24	Feedthrough	ZL-RTB20	ZL-D0-CBL24 *L
		Sensor	ZL-LTB16-24	ZL-D0-CBL24 *L
F0-08NA-1	10	Feedthrough	ZL-RTB20	ZL-D0-CBL10 *

DL05/06 PLC Combo In/Out Module ZIPLink Selector				
PLC		ZIPLink		
Combo Module	# of Terms	Component	Module Part No.	Cable Part No.
D0-07CDR	10	Feedthrough	ZL-RTB20	ZL-D0-CBL10 *
D0-08CDD1	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *

DL05/06 PLC Analog Module ZIPLink Selector				
PLC		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
F0-04AD-1	8	Feedthrough	ZL-RTB20	ZL-D0-CBL8 *
F0-04AD-2	8	Feedthrough	ZL-RTB20	ZL-D0-CBL8 *
F0-08ADH-1	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
F0-08ADH-2	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
F0-04DAH-1	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
F0-08DAH-1	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
F0-04DAH-2	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
F0-08DAH-2	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
F0-2AD2DA-2	8	Feedthrough	ZL-RTB20	ZL-D0-CBL8 *
F0-4AD2DA-1	8	Feedthrough	ZL-RTB20	ZL-D0-CBL8 *
F0-4AD2DA-2	8	Feedthrough	ZL-RTB20	ZL-D0-CBL8 *
F0-04RTD <sup>2</sup>	Matched Only		See Note 2	
F0-04THM <sup>2</sup>	Matched Only		See Note 2	

**NOTE: ZIPLINK CONNECTOR MODULES SPECIFICATIONS FOLLOW THE COMPATIBILITY MATRIX TABLES. ZIPLINK CABLES SPECIFICATIONS ARE AT THE END OF THIS ZIPLINK SECTION.**

DL05/06 PLC Output Module ZIPLink Selector				
PLC		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
D0-10TD1	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
D0-16TD1	24	Feedthrough	ZL-RTB20	ZL-D0-CBL24 *
		Fuse	ZL-RFU20 <sup>3</sup>	ZL-D0-CBL24 *
		Relay (sinking)	ZL-RRL16-24-1	ZL-D0-CBL24 *
D0-10TD2	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *
D0-16TD2	24	Feedthrough	ZL-RTB20	ZL-D0-CBL24 *
		Fuse	ZL-RFU20 <sup>3</sup>	ZL-D0-CBL24 *
		Relay (sourcing)	ZL-RRL16-24-2	ZL-D0-CBL24 *
D0-08TR	10	Feedthrough	ZL-RTB20	ZL-D0-CBL10 *
F0-04TRS <sup>1</sup>	13	Feedthrough	ZL-RTB20	ZL-D0-CBL13 *

DL05/06 PLC Fixed I/O ZIPLink Selector				
PLC		ZIPLink		
PLC	# of Terms	Component	Module Part No.	Cable Part No.
DL05	18	Feedthrough	ZL-RTB20	ZL-D05-CBL18 *
DL06 **	20 (Input side only)	Feedthrough	ZL-RTB20	ZL-D06X-CBL20 *
	20 (Output side only)	Feedthrough	ZL-RTB20	ZL-D06Y-CBL20 *

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

\*\* Inputs side only connects X0 through X17. X20 thru X23 will have to be hand wired if used. Output side the power and auxiliary power terminals will have to be hand wired.

<sup>1</sup> Caution: The F0-04TRS relay outputs are derated not to exceed 2A per point when used with the ZIPLink wiring system.

<sup>2</sup> These modules are not supported by the ZIPLink wiring system.

<sup>3</sup> Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits. To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.





# PLC I/O Modules to ZIPLink Connector Modules – Do-more / DL205

Do-more / DL205 PLC Input Module ZIPLink Selector				
PLC		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No. †
D2-08ND3	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-16ND3-2	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
		Sensor	ZL-LTB16-24	ZL-D2-CBL19 *
D2-32ND3 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
			ZL-D24-CBL40 *X	
		Sensor	ZL-LTB32-24	ZL-D24-CBL40 *
			ZL-D24-CBL40 *X	
D2-32ND3-2 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		ZL-D24-CBL40 *X		
D2-08NA-1	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
			ZL-D2-CBL10 *	
D2-08NA-2	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-16NA	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *

† X in the part number represents a 45° angle.

Do-more/DL205 PLC Combo In/Out Module ZIPLink Selector				
PLC		ZIPLink		
Combo Module	# of Terms	Component	Module Part No.	Cable Part No.
D2-08CDR	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *

Do-more/DL205 PLC Analog Module ZIPLink Selector				
PLC		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
F2-04AD-1	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-04AD-1L	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-08AD-1	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-04AD-2	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-04AD-2L	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-08AD-2	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-02DA-1	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-02DA-1L	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-02DAS-1	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-08DA-1	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
F2-02DA-2	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-02DA-2L	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-02DAS-2	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-08DA-2	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-4AD2DA	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-8AD4DA-1	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
F2-8AD4DA-2	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
F2-04RTD <sup>4</sup>	Matched Only		See Note 4	
F2-04THM <sup>4</sup>	Matched Only		See Note 4	

Do-more/ DL205 PLC Output Module ZIPLink Selector				
PLC		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No. †
D2-04TD1 <sup>1</sup>	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-08TD1	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-08TD2	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-16TD1-2	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
		Fuse	ZL-RFU20 <sup>5</sup>	ZL-D2-CBL19 *
D2-16TD2-2	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
		Fuse	ZL-RFU20 <sup>5</sup>	ZL-D2-CBL19 *
		Relay	ZL-RR16-24-2	ZL-D2-CBL19 *
F2-16TD1P	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
F2-16TD2P	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
D2-32TD1 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Fuse	ZL-RFU40 <sup>5</sup>	ZL-D24-CBL40 *X
D2-32TD2 <sup>2</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
			ZL-D24-CBL40 *X	
		Fuse	ZL-RFU40 <sup>5</sup>	ZL-D24-CBL40 *
D2-08TA	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-08TA	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-12TA	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
		Fuse	ZL-RFU20 <sup>5</sup>	ZL-D2-CBL19 *
D2-04TRS <sup>3</sup>	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-08TR	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
F2-08TRS <sup>3</sup>	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
F2-08TR <sup>3</sup>	10	Feedthrough	ZL-RTB20	ZL-D2-CBL10 *
D2-12TR	19	Feedthrough	ZL-RTB20	ZL-D2-CBL19 *
		Fuse	ZL-RFU20 <sup>5</sup>	ZL-D2-CBL19 *

† X in the part number represents a 45° angle plug

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

1 To make a custom cable for the 32-point modules, use: Ribbon-style Connector ZL-D24-CON-R, Solder-style 180° connector ZL-D24-CON or Solder-style 45° connector ZL-D24-CON-X

2 Caution: The D2-04TD1, D2-04TRS, and F2-08TRS outputs are derated not to exceed module specs 2A per point and 2A per common when used with the ZIPLink wiring system.

3 The F2-08TR outputs are derated not to exceed 2A per point and 4A per common when used with the ZIPLink wiring system.

4 The F2-04RTD and F2-04THM modules are not supported by the ZIPLink wiring system.

5 Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits.

To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.



NOTE: ZIPLINK CONNECTOR MODULES SPECIFICATIONS FOLLOW THE COMPATIBILITY MATRIX TABLES. ZIPLINK CABLES SPECIFICATIONS ARE AT THE END OF THIS ZIPLINK SECTION.



# PLC I/O Modules to ZIPLink Connector Modules - DL305

DL305 PLC Input Module ZIPLink Selector				
PLC		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
D3-08ND2 <sup>1</sup>	10	See Note 1		
D3-16ND2-1	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
D3-16ND2F	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
D3-16ND3F	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
D3-08NA-1 <sup>1</sup>	10	See Note 1		
D3-08NA-2 <sup>1</sup>	10	See Note 1		
D3-16NA	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
D3-08NE3 <sup>1</sup>	10	See Note 1		
D3-16NE3	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
		Sensor	ZL-LTB16-24	ZL-D3-CBL18 *

DL305 PLC Analog Module ZIPLink Selector				
PLC		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
F3-04ADS	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
F3-08AD-1	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
F3-16AD	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
F3-04DA-1	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
F3-04DAS	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
F3-08THM-J <sup>3</sup>	T/C Wire Only	See Note 3		
F3-08THM-K <sup>3</sup>	T/C Wire Only	See Note 3		

**NOTE: ZIPLINK CONNECTOR MODULES SPECIFICATIONS FOLLOW THE COMPATIBILITY MATRIX TABLES. ZIPLINK CABLE SPECIFICATIONS ARE AT THE END OF THIS ZIPLINK SECTION.**

DL305 PLC Output Module ZIPLink Selector				
PLC		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
D3-04TD1 <sup>1</sup>	10	See Note 1		
D3-08TD1 <sup>1</sup>	10	See Note 1		
D3-08TD2 <sup>1</sup>	10	See Note 1		
D3-16TD1-1	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-D3-CBL18 *
		Relay (sinking)	ZL-RR16-24-1	ZL-D3-CBL18 *
D3-16TD2	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-D3-CBL18 *
		Relay (sourcing)	ZL-RR16-24-2	ZL-D3-CBL18 *
D3-04TAS <sup>1</sup>	10	See Note 1		
F3-08TAS-1	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
D3-08TA-1	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
D3-08TA-2 <sup>1</sup>	10	See Note 1		
F3-16TA-2	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-D3-CBL18 *
D3-16TA-2	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-D3-CBL18 *
D3-08TR <sup>1</sup>	10	See Note 1		
D3-16TR <sup>2</sup>	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-D3-CBL18 *
F3-08TRS-1 <sup>2</sup>	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *
F3-08TRS-2 <sup>2</sup>	18	Feedthrough	ZL-RTB20	ZL-D3-CBL18 *

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

<sup>1</sup> These I/O modules have non-removable terminal blocks which can be terminated using the ZL-CBL24-1P or 2P pigtail cable and the ZL-RTB20 module of the ZIPLink wiring system.

<sup>2</sup> Caution: The D3-16TR, F3-08TRS-1 and F3-08TRS-2 relay outputs are derated not to exceed 2A per point and 4A per common when used with the ZIPLink wiring system.

<sup>3</sup> The F3-08THM-J and F3-08THM-K modules are not supported by the ZIPLink wiring system.

<sup>4</sup> Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits. To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.





# PLC I/O Modules to ZIPLink Connector Modules - DL405

DL405 PLC Input Module ZIPLink Selector				
PLC		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
D4-08ND3S	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
D4-16ND2	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
		Sensor	ZL-LTB16-24	ZL-D4-CBL20 *
D4-16ND2F	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
		Sensor	ZL-LTB16-24	ZL-D4-CBL20 *
D4-32ND3-1 <sup>2</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Sensor	ZL-LTB32-24	ZL-D24-CBL40 *X
D4-32ND3-2 <sup>2</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Sensor	ZL-LTB32-24	ZL-D24-CBL40 *X
D4-64ND2 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Sensor	ZL-LTB32-24	ZL-D24-CBL40 *X
D4-08NA <sup>3</sup>	11	See Note 3		
D4-16NA	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
D4-16NA-1	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
D4-16NE3	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
		Sensor	ZL-LTB16-24	ZL-D4-CBL20 *
F4-08NE3S	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *

DL405 PLC Analog Module ZIPLink Selector				
PLC		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
F4-04AD	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-04ADS	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-08AD	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-16AD-1	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-16AD-2	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-04DA-1	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-04DA-2	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-08DA-1	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-16DA-1	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-08DA-2	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-16DA-2	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-04DAS-1	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-04DAS-2	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-08THM <sup>4</sup>	T/C Wire Only		See Note 3	
F4-08THM-n <sup>4</sup>	T/C Wire Only		See Note 3	
F4-08RTD <sup>5</sup>	T/C Wire Only		See Note 3	

**NOTE: ZIPLINK CONNECTOR MODULES SPECIFICATIONS FOLLOW THE COMPATIBILITY MATRIX TABLES. ZIPLINK CABLES SPECIFICATIONS ARE AT THE END OF THIS ZIPLINK SECTION.**

DL405 PLC Output Module ZIPLink Selector				
PLC		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
D4-08TD1 <sup>3</sup>	11	See Note 3		
F4-08TD1S <sup>3</sup>	20	See Note 3		
D4-16TD1	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
		Fuse	ZL-RFU20 <sup>6</sup>	ZL-D4-CBL20 *
D4-16TD2	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
		Fuse	ZL-RFU20 <sup>6</sup>	ZL-D4-CBL20 *
		Relay	ZL-RRL16-24-2	ZL-D4-CBL20 *
D4-32TD1 <sup>2</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Fuse	ZL-RFU40 <sup>6</sup>	ZL-D24-CBL40 *X
D4-32TD1-1	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Fuse	ZL-RFU40 <sup>6</sup>	ZL-D24-CBL40 *X
D4-32TD2 <sup>2</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Fuse	ZL-RFU40 <sup>6</sup>	ZL-D24-CBL40 *X
D4-64TD1 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-D24-CBL40 *
		Fuse	ZL-RFU40 <sup>6</sup>	ZL-D24-CBL40 *X
D4-08TA <sup>3</sup>	11	See Note 3		
D4-16TA	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
		Fuse	ZL-RFU20 <sup>6</sup>	ZL-D4-CBL20 *
D4-08TR <sup>3</sup>	11	See Note 3		
F4-08TRS-1 <sup>5</sup>	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
F4-08TRS-2 <sup>5</sup>	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
D4-16TR <sup>4</sup>	20	Feedthrough	ZL-RTB20	ZL-D4-CBL20 *
		Fuse	ZL-RFU20 <sup>6</sup>	ZL-D4-CBL20 *

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

- <sup>1</sup> The D4-64ND2 and D4-64TD1 modules have two 32-point connectors and require two ZIPLink cables and two ZIPLink connector modules.
- <sup>2</sup> To make a custom cable for the 32 or 64-point modules, use: Ribbon-style Connector ZL-D24-CON-R, Solder-style 180° connector ZL-D24-CON or Solder-style 45° connector ZL-D24-CON-X
- <sup>3</sup> These modules are not supported by the ZIPLink wiring system.
- <sup>4</sup> Caution: The D4-16TR really outputs are derated not to exceed 2 Amps per point and 4 Amps per common when used with the ZIPLink wiring system.
- <sup>5</sup> The F4-08TRS-1 and F4-08TRS-2 are derated not to exceed 2 Amps per point and 2 Amps per common when used with the ZIPLink wiring system.
- <sup>6</sup> Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits. To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.







# PAC I/O Modules to ZIPLink Connector Modules - Productivity3000

Productivity3000 PAC Input Module ZIPLink Selector				
PAC		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
P3-08NAS	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
P3-08ND3S	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
P3-16NA	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-16ND3	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
		Sensor	ZL-LTB16-24	ZL-P3-CBL20- *L
P3-32ND3	40	Feedthrough	ZL-RTB40	ZL-CBL40 *
		Sensor	ZL-LTB32-24	ZL-CBL40 *
P3-64ND3 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-CBL40 *
		Sensor	ZL-LTB32-24	ZL-CBL40 *

Productivity3000 PAC Analog In Module ZIPLink Selector				
PAC		ZIPLink		
Analog Module	# of Terms	Component	Module	Cable
P3-04ADS	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-08AD	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-16AD-1	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-16AD-2	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-08RTD <sup>2</sup>	Matched Only	See Note 2		
P3-08THM <sup>2</sup>	T/C Wire Only	See Note 2		
P3-04DA	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-08DA-1	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-08DA-2	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-06DAS-1	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-06DAS-2	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-16DA-1	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-16DA-2	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-8AD4DA-1	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-8AD4DA-2	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L

Productivity3000 PAC Specialty Module ZIPLink Selector				
PAC		ZIPLink		
Input Module	# of Terms	Component	Module Part No.	Cable Part No.
P3-HSI	40	Feedthrough	ZL-RTB40	ZL-CBL40 *S
P3-HSO	40	Feedthrough	ZL-RTB40	ZL-CBL40 *S

**NOTE: ZIPLINK CONNECTOR MODULES SPECIFICATIONS FOLLOW THE COMPATIBILITY MATRIX TABLES. ZIPLINK CABLES SPECIFICATIONS ARE AT THE END OF THIS ZIPLINK SECTION.**

Productivity3000 PAC Output Module ZIPLink Selector				
PAC		ZIPLink		
Output Module	# of Terms	Component	Module Part No.	Cable Part No.
P3-08TAS	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
P3-08TD1S	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-08TD2S	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20- *L
P3-08TRS	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
P3-16TA	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-P3-CBL20 *
P3-16TD1	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-P3-CBL20 *
		Relay (sinking)	ZL-RRL16-24-1	ZL-P3-CBL20 *
P3-16TD2	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-P3-CBL20 *
		Relay (sourcing)	ZL-RRL16-24-2	ZL-P3-CBL20 *
P3-16TR	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-P3-CBL20 *
P3-08TRS-1 <sup>3</sup>	20	Feedthrough	ZL-RTB20	ZL-P3-CBL20 *
		Fuse	ZL-RFU20 <sup>4</sup>	ZL-P3-CBL20 *
P3-32TD1	40	Feedthrough	ZL-RTB40	ZL-CBL40 *
		Fuse	ZL-RFU40 <sup>4</sup>	ZL-CBL40 *
P3-32TD2	40	Feedthrough	ZL-RTB40	ZL-CBL40 *
		Fuse	ZL-RFU40 <sup>4</sup>	ZL-CBL40 *
P3-64TD1 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-CBL40 *
		Fuse	ZL-RFU40 <sup>4</sup>	ZL-CBL40 *
P3-64TD2 <sup>1</sup>	40	Feedthrough	ZL-RTB40	ZL-CBL40 *
		Fuse	ZL-RFU40 <sup>4</sup>	ZL-CBL40 *
P3-16TD3P	40	Feedthrough	ZL-RTB40	ZL-CBL40 *

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m.

<sup>1</sup> The P3-64ND3, P3-64TD1 and P3-64TD2 modules have two 32-point connectors and require two ZIPLink cables and two ZIPLink connector modules.

<sup>2</sup> These modules are not supported by the ZIPLink wiring system.

<sup>3</sup> The P3-08TRS-1 output module is derated not to exceed 2A per point maximum when used with the ZIPLink wiring system.

<sup>4</sup> Note: Fuses (5 x 20 mm) are not included. See Edison Electronic Fuse section for (5 x 20 mm) fuse. S500 and GMA electronic circuit protection for fast-acting maximum protection. S506 and GMC electronic circuit protection for time-delay performance. Ideal for inductive circuits. To ensure proper operation, do not exceed the voltage and current rating of ZIPLink module. ZL-RFU20 = 2A per circuit; ZL-RFU40 = 400 mA per circuit.






# PLC I/O to 3rd Party Devices

PLC I/O to 3rd Party Devices ZIPLink Cable Selector				
PLC		ZIPLink		
PLC Family	# of Terms	Number of Wires	Pigtail Cable Part No. †	Length (Replace * with number)
CLICK I/O Modules	11	11	ZL-C0-CBL11- *P	1 = 1 meter, 2 = 2 meters
	20	20	ZL-C0-CBL20 *P	
DL05 PLC Fixed I/O	22	22	ZL-D05-CBL22- *P	
DL06 PLC Fixed I/O	24	24	ZL-D06-CBL24- *P	
DL05 & DL06 I/O Modules	8	8	ZL-D0-CBL8- *P	
	10	10	ZL-D0-CBL10- *P	
	13	13	ZL-D0-CBL13- *P	
	24	24	ZL-D0-CBL24- *P	
DL205 I/O Modules	10	10	ZL-D2-CBL10- *P	
	19	19	ZL-D2-CBL19- *P	
	40	40	ZL-D24-CBL40- *P ZL-D24-CBL40- *XP	
DL405 I/O Modules	20	20	ZL-D4-CBL20- *P	
	40	40	ZL-D24-CBL40- *XP	
			ZL-D24-CBL40- *P	
Productivity2000 I/O Modules	20	20	ZL-P2-CBL18- *P	
	24	24	ZL-P2-CBL24- *P	
Productivity3000 I/O Modules	20	20	ZL-P3-CBL20- *P	
	40	40	ZL-P3-CBL40- *P	

†X = 45° cable connector, all other cables have 180° cable connector

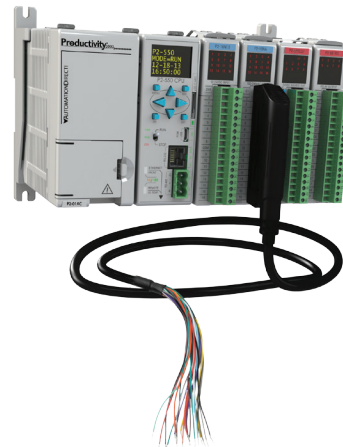



# Specialty Modules

ZIPLink Specialty Modules Selector			
ZIPLink			
Module	Type	Module Part No.	Cable Part No. (optional)
24VDC Stand-Alone Relay	Single-Socket Relay	ZL-RLS1-24	N/A
	Four Socket-Relay	ZL-RLS4-24	
120VAC Stand-Alone Relay	Single-Socket Relay	ZL-RLS1-120	N/A
	Four-Socket Relay	ZL-RLS4-120	
24VDC Transorb	8-Channel	ZL-TSD8-24	N/A
120VAC Transorb	8-Channel	ZL-TSD8-24	N/A
D-Sub Feedthrough	9-pin Male & Female D-Subs to Terminal Blocks	ZL-RTB-DB09	ZL-DB9-CBL-2
	15-pin Male & Female D-Subs to Terminal Blocks	ZL-RTB-DB15	ZL-DB15-CBL-2
	25-pin Male & Female D-Subs to Terminal Blocks	ZL-RTB-DB25	ZL-DB25-CBL-2
RJ12 Feedthrough	6-pin RJ12 to Terminal Block	ZL-RTB-RJ12	ZL-RJ12-CBL-2
Comm Port Adapters	15-pin HD D-Sub to Terminal Block	ZL-CMA15	N/A
	15-pin HD D-Sub to Terminal Block with LED Indicators	ZL-CMA15L	N/A
Comm Distribution	4-Port RJ12 to Terminal Block	ZL-CDM-RJ12X4	N/A
	10-Port RJ12 to Terminal Block	ZL-CDM-RJ12X10	N/A
Feedthrough Module (SureServo I/O)	50-pin to Terminal Blocks	ZL-RTB50	ZL-SVC-50CBL *

\* Select the cable length by replacing the \* with: Blank = 0.5m, -1 = 1.0m, or -2 = 2.0m





# Connector Modules to 3rd Party Devices

ZIPLink Connector Modules to 3rd Party Devices Selector			
ZIPLink			
Module	Type	Module Part No.	Pigtail Cable Part No. (optional)
Feedthrough Connector	24-pin to Terminal Blocks	ZL-RTB20	ZL-CBL24-1P
			ZL-CBL24-2P
	40-pin to Terminal Blocks	ZL-RTB40	ZL-CBL40-1P
			ZL-CBL40-2P
	50-pin to Terminal Blocks	ZL-RTB50	ZL-CBL50-1P
			ZL-CBL50-2P
Fuse	16-Fuse, 24-pin	ZL-RFU20	ZL-CBL24-1P
			ZL-CBL24-2P
	32-Fuse, 40-pin	ZL-RFU40	ZL-CBL40-1P
			ZL-CBL40-2P
24VDC Powered Relay	16-Relay, Sinking, 24-pin	ZL-RRL16-24-1	ZL-CBL24-1P
			ZL-CBL24-2P
	16-Relay, Sourcing, 24-pin	ZL-RRL16-24-2	ZL-CBL24-1P
			ZL-CBL24-2P
Sensor Input	16-Point with LEDs	ZL-LTB16-24	ZL-CBL24-1P
			ZL-CBL24-2P
	32-Point with LEDs	ZL-LTB32-24	ZL-CBL40-1P
			ZL-CBL40-2P
D-Sub Feedthrough	9-pin D-Sub to Terminal Block	ZL-RTB-DB09	ZL-DB9F-CBL-2P
			ZL-DB9F-CBL-5P

