


LOW VOLTAGE GENERAL PURPOSE TRANSFORMERS

Features

- cULus Listed
- 100, 150, 300, 600, 750, 1000 VA.
- 1 Phase, 60 Hz, 120 or 240 volt input.
- 12 or 24 volt output.
- Input Auto-Thermal reset switch.
- Output circuit breaker.
- Fully encapsulated core and coil.
- Full fault current carrying Faraday Shield.
- Flexible copper leadwire terminations.
- UL class 180°C insulation system 115°C rise.
- UL Type 2 enclosure.
- Keyhole slotted wall mounting brackets.
- Black finish.
- Bottom access.
- Two 0.875 (2.2 cm) single knockouts each side.
- Two dual 0.875 (2.2 cm) and 1.125 (2.9 cm) knockouts on bottom cover.

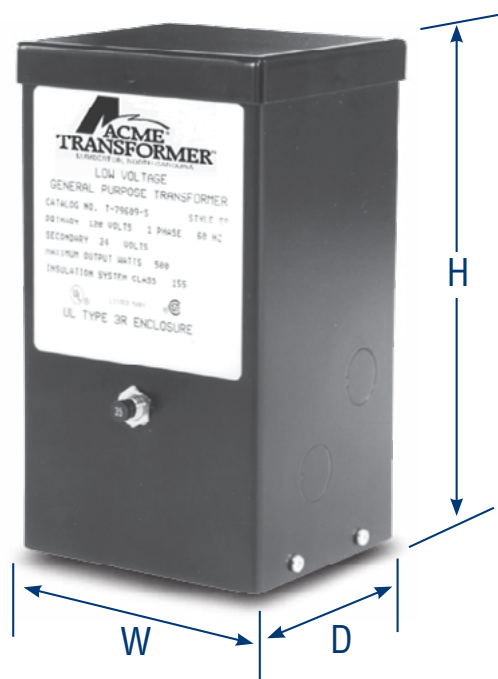

120 PRIMARY VOLTS — 12 SECONDARY VOLTS — TWO WINDINGS — 1Ø, 60 Hz



VA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	CB Rating	CB Style
100	T179600S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	15 AMP	Push To Reset Thermal Breaker
150	T179620S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	20 AMP	Push To Reset Thermal Breaker
300	T179621S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	11 (5.0)	40 AMP	Push To Reset Thermal Breaker
600	T179622S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	15 (6.8)	60 AMP	Magnetic Toggle On/Off Breaker
750	T179603S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	18 (8.2)	75 AMP	Magnetic Toggle On/Off Breaker
1000	T179604S	11.93 (30.3)	5.41 (13.7)	5.20 (13.2)	26 (11.8)	100 AMP	Magnetic Toggle On/Off Breaker

120 PRIMARY VOLTS — 24 SECONDARY VOLTS — TWO WINDINGS — 1Ø, 60 Hz

VA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	CB Rating	CB Style
100	T179605S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	7 AMP	Push To Reset Thermal Breaker
150	T179623S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	10 AMP	Push To Reset Thermal Breaker
300	T179624S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	11 (5.0)	20 AMP	Push To Reset Thermal Breaker
600	T179625S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	15 (6.8)	40 AMP	Push To Reset Thermal Breaker
750	T179608S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	18 (8.2)	50 AMP	Push To Reset Thermal Breaker
1000	T179609S	11.93 (30.3)	5.41 (13.7)	5.20 (13.2)	26 (11.8)	50 AMP	Magnetic Toggle On/Off Breaker

240 PRIMARY VOLTS — 24 SECONDARY VOLTS — TWO WINDINGS — 1Ø, 60 Hz

VA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	CB Rating	CB Style
100	T179615S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	7 AMP	Push To Reset Thermal Breaker
150	T179629S	9.01 (22.9)	4.08 (10.4)	3.88 (9.9)	7 (3.2)	10 AMP	Push To Reset Thermal Breaker
300	T179630S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	11 (5.0)	20 AMP	Push To Reset Thermal Breaker
600	T179631S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	15 (6.8)	40 AMP	Push To Reset Thermal Breaker
750	T179618S	11.68 (29.7)	4.66 (11.8)	4.57 (11.6)	18 (8.2)	50 AMP	Push To Reset Thermal Breaker
1000	T179619S	11.93 (30.3)	5.41 (13.7)	5.20 (13.2)	26 (11.8)	50 AMP	Magnetic Toggle On/Off Breaker

