

Heavy-Duty Air Circulators - 230/460V

Pedestal, Wall, I-Beam & Ceiling Mount Fans Non-Oscillating



5 Year Warranty - Ultra Quiet

FEATURES

- 230/460V, 1/4 HP, 3 Phase, 1 Speed, Totally Enclosed Ball Bearing Motor

PERFORMANCE 230/460V

Prop Dia.	CFM	RPM	Motor No.	F.L. Amps
24"	5739	1140	1069	1.2/.6
30"	8723	1140	1069	1.2/.6

Performance Ratings are conducted in accordance with AMCA Standard 230-99.

EDP No.	Catalog No.	Prop Dia.	Fan Style	HP	Ship Wt.	List Price
20600K	24LF36	24"	Pedestal Fan: includes 21152(Pedestal) , 21166(Base)	1/4	70	\$1,453
20620K	24LW368	24"	Wall Mount Fan: includes 21166 (Wall Brkt. with Safety Cable)	1/4	49	\$1,301
20640K	24LI36	24"	I-Beam Mount Fan: includes 21191 (I-Beam Brkt. with Safety Cable)	1/4	49	\$1,381
20630K	24LS36	24"	Ceiling Mount Fan: includes 21203 (Ceiling Kit with Safety Cable)	1/4	39	\$1,267
20650K	30LF36	30"	Pedestal Fan: includes 21152 (Pedestal), 21166(Base)	1/4	77	\$1,535
20670K	30LW368	30"	Wall Mount Fan: includes 21187 (Wall Brkt with Safety Cable)	1/4	56	\$1,381
20690K	30LI36	30"	I-Beam Mount Fan: includes 21191 (I-Beam Brkt. with Safety Cable)	1/4	56	\$1,459
20680K	30LS36	30"	Ceiling Mount Fan: includes 21203 (Ceiling Kit with Safety Cable)	1/4	46	\$1,346


All 24" Kitted Components consist of: 21025 (1069 B Motor); 21070 (AC-24G Guard Assembly); 21095 (24BA-1A Prop); plus mounting listed above.

All 30" Kitted Components consist of: 21025 (1069 B Motor); 21080 (AC30-G Guard Assembly); 21105 (30BA-1A Prop); plus mounting listed above.

FAN VELOCITY PROFILES


Represents all 18" and 20" 1/5 HP Heavy Duty Air Circulators.

18" HORIZONTAL VELOCITY PROFILE (Ft/Min)

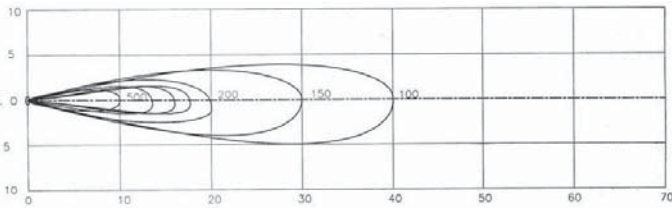

18" FAN VELOCITY PROFILE (Ft/Min)


20" HORIZONTAL VELOCITY PROFILE (Ft/Min)

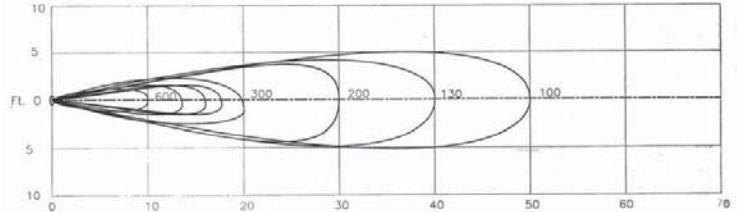

20" FAN VELOCITY PROFILE (Ft/Min)

Represents all 24" and 30" 1/3 HP Heavy Duty Air Circulators.

24" HORIZONTAL VELOCITY PROFILE (Ft/Min)

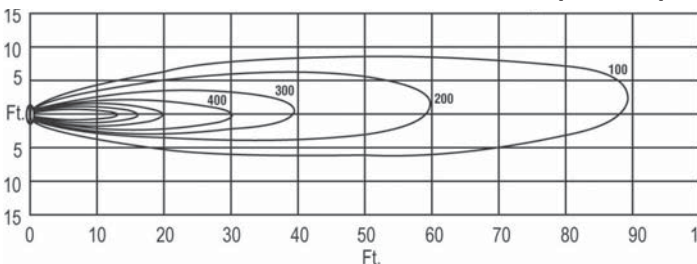

30" HORIZONTAL VELOCITY PROFILE (Ft/Min)

