


# HOIST RINGS


- Other metric and imperial thread dimensions are available

## SWIVEL EYE BOLT WITH RING, Grade 100 / Grade 80

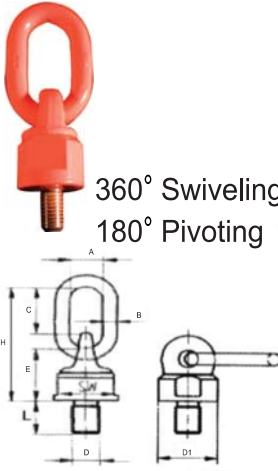

Part #	Rated Load (metric tons)	Metric Thread (DxL)	Dimensions (mm)							Weight (kg)
			A	B	C	E	H	SW	D1	
<b>Grade 100</b>										
C800X0141620	1.4	M16X20	30	13	46	50	105	30	38	0.53
C800X0252030	2.5	M20X30	34	16	57	61	131	40	50	1.05
C800X0402430	4	M24X30	40	19	70	68	153	48	58	1.63
C800X0673654	6.7	M36X54	40	20	65	80	165	65	75	2.23
<b>Grade 80</b>										
C8000031018	0.3	M10X18	30	13	46	50	105	30	38	0.48
C8000051218	0.5	M12X18	30	13	46	50	105	30	38	0.50
C8000101620	1.12	M16X20	30	13	46	50	105	30	38	0.53
C8000202030	2	M20X30	34	16	57	61	131	40	50	1.05
C8000302430	3.15	M24X30	40	19	70	68	153	48	58	1.63
C8000503035	5.3	M30X35	40	20	65	80	165	65	75	2.23
C8000803654	8	M36X54	50	22	90	95	205	75	85	5.50
C8001004263	10	M42X63	50	22	90	95	205	75	85	10.00
C8001505678	15	M56X78	70	30	120	130	280	95	120	10.00


## SWIVEL EYE BOLT WITH BRACKET, Grade 100

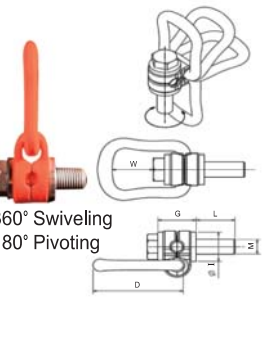

Part #	Rated Load (metric tons)	Metric Thread (MxL)	Dimensions (mm)													Weight (kg)
			A	B	C	D	E	F	G	H	I	W	J	K	CH	
C806X08	0.3	M8X15	57	34	10	78	24	41	30	26.5	25	43	51	35	13	0.28
C806X10	0.63	M10X15	57	34	10	78	24	41	30	26.5	25	42	51	35	17	0.29
C806X12	1	M12X23	66	38	13.5	85	30	50	36	33	32	40	52	28	19	0.50
C806X16	1.5	M16X24	66	38	13.5	85	30	50	36	33	32	38	52	28	24	0.51
C806X20	2.5	M20X31	87	55	16	111	48	68	44	42.5	45	54	71	36	30	1.25
C806X24	4	M24X37	87	55	16	111	48	68	44	42.5	45	51	71	36	36	1.30
C806X30	5	M30X45	109	66	22.5	145	54	91	65	58.5	60	62	86	47	46	3.25
C806X36	8	M36X59	136	78	28	190	62	108	81	72.5	70	88	115	74	55	5.90
C806X42	15	M42X61	169	97	36	242	68	131	89	87.5	85	121	151	97	65	11.20
C806X48	20	M48X71	169	97	36	242	68	131	89	87.5	95	117	151	93	75	11.60

## SWIVEL EYE BOLT WITH KEY, Grade 100


turns 360° can be loaded in any direction

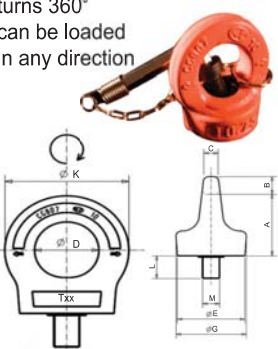

Part #	Rated Load (metric tons)	Metric Thread (MxL)	Dimensions (mm)						Weight (kg)
			A	B	C	D	E	K	
C807XC10	0.4	M10X16	44.5	8	10	29	32	45	0.30
C807XC12	0.75	M12X18	53.5	11	11	34	44	56	0.46
C807XC16	1.5	M16X24	56.5	13	14.5	39	56	65	0.90
C807XC20	2.5	M20X30	67	14	17	42	58	70	1.15
C807XC24	3.2	M24X36	80	18	19	52	73	88	2.05
C807XC30	4.5	M30X43	101	22	27	62	80	106	4.00
C807XC36*	7	M36X54	125	37	38	80	95	154	6.70
C807XC42*	9	M42X64	148	40	41	90	105	170	9.50
C807XC48*	12	M48X72	165	45	47	95	120	185	13.40


\*M36-M42-M48 dimensions might vary

## LIFTING RING WELD-ON TYPE DOUBLE BASE, Grade 100

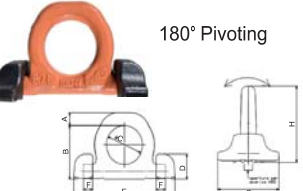

Part #	Rated Load (metric tons)	Dimensions (mm)								Weight (kg)
		A	B	C	D	E	F	G	H	
C820X04	4	14	65	48	29	134	14	60	79	0.73
C820X067	6.7	20	83	60	39	169	16	88	103	1.80
C820X10	10	22	96	65	48	196	19.5	98	118	3.00
C820X16	16	31	126	90	55	264	29	127	155	5.75
C820X30	30	42	175	130	79	371	45	157	217	16.00

## LIFTING RING WELD-ON TYPE SINGLE BASE, Grade 100

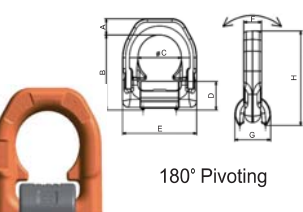

Part #	Rated Load (metric tons)	Dimensions (mm)								Weight (kg)
		A	B	C	D	E	F	G	H	
C830X015M	1.5	14	65	38	25	66	16	31	79	0.39
C830X025M	2.5	16	75	45	27	77	18	34.5	91	0.59
C830X040M	4	18	84	51	32	87	20	40	102	0.87
C830X067M	6.7	24	117	67.3	44	115	26	58.5	141	2.23
C830X010M	10	31	126	67	55	129	28.5	70.5	157	3.33
C830X016M	16	45	174	100	69	190	42	87	219	9.28