


### 1-1/2" (38mm) Rectangular Padlocks

For all: body width=1-1/2" (38mm), body thickness=3/4" (19mm), shackle diameter=1/4" (6mm), and horizontal clearance=3/4" (19mm)

Specifications	Models		
5-pin / APTC12	A5100	A5101	A5102
6-pin / APTC14	A6100	A6101	A6102
Shackle Height	1" (25mm)	1-1/2" (38mm)	3" (75mm)

Keying Options – Keyed Alike (KA), Keyed Different (KD), Master Keyed (MK), BumpStop®, Edge®

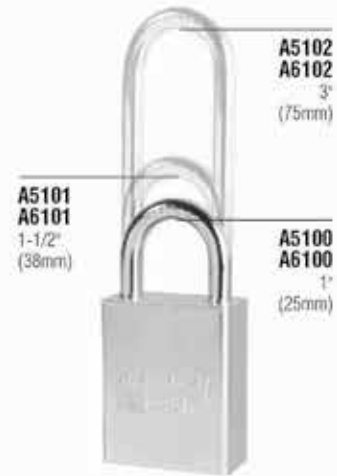

### REKEYABLE SOLID STAINLESS STEEL PADLOCKS

Weatherbuilt™ Padlock Protection available.

#### A5400 and A6400

For all: body width=1-3/4" (44mm), body thickness=3/4" (19mm), shackle diameter = 5/16" (8mm) and horizontal clearance=3/4" (19mm)

#### A5460 and A6460

For all: body width=2" (50mm), body thickness=3/4" (19mm), shackle diameter = 3/8" (10mm) and horizontal clearance=3/4" (19mm)

Specifications	Models	
5-pin / APTC12	A5400	A5401
	A5460	A5461
6-pin / APTC14	A6400	A6401
	A6460	A6461
Shackle Height	1-1/8" (28mm)	2" (50mm)

Keying Options – Keyed Alike (KA), Keyed Different (KD), Master Keyed (MK), BumpStop®, Edge®



### NON-REKEYABLE SOLID STEEL PADLOCKS

Designed to secure job boxes and other heavy duty applications. Non-serviceable five-pin APTC12 cylinder can be factory keyed to your requirements.

#### A50HS

Fits Knaack and Watchman IV job boxes and has stainless steel pins for additional drill resistance.

For all: body width=2" (50mm), body thickness=7/8" (22mm), shackle diameter=3/8" (10mm) and horizontal clearance=3/4" (19mm)

Specifications	Models		
5-pin / APTC12	A50 A50HS	A51	A52
Shackle Height	1-1/8" (28mm)	2" (50mm)	3" (75mm)

Keying Options – Keyed Alike (KA), Keyed Different (KD), Master Keyed (MK), BumpStop®, Edge®

