

## Drift Pin, Barrel Type/Double-End Aligning Pin

Broche fusiforme  
Perno de Dirección, Tipo Barril



No.	a mm	d mm	l mm	△ g	a inch	d inch	l inch	△ lbs.
D-1	5	17	200	230	3/16	11/16	8	.50
D-2	8	21	200	360	5/16	13/16	8	.80
D-3	10	24	200	415	7/16	15/16	8	.94
D-4	13	27	200	600	9/16	1-1/16	8	1.32
D-5	18	30	200	880	11/16	1-3/16	8	1.95
D-6	22	33	200	1050	13/16	1-5/16	8	2.32

## Drift Pin, Straight Type/Single-End Aligning Pin


Broches d'assemblage, droite/simple d'alignement  
Perno pasador, Perno alineador recto/de extremo simple



No.	a mm	d mm	l mm	△ g	a inch	d inch	l inch	△ lbs.
D-20	6	13	150	100	1/4	1/2	6	.22
D-21	7	17	150	100	9/32	11/16	6	.22
D-22	8	21	205	175	5/16	13/16	8	.38
D-23	12	24	255	645	7/16	15/16	10	1.42
D-24	13	29	255	865	1/2	1-1/8	10	1.90

## Pin, Offset

Goupille coudée  
Perno Acodado

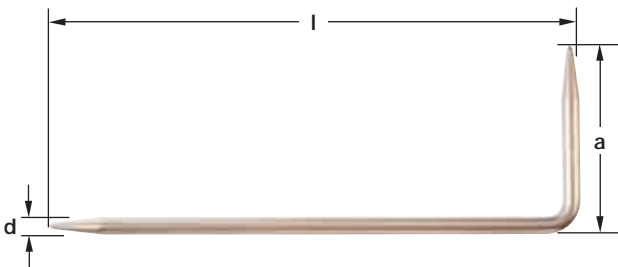

No.	d mm	a mm	l mm	△ g	d inch	a inch	l inch	△ lbs.
P-8200	16	152	450	930	5/8	6	17-3/4	2.05
P-8202	19	152	450	1300	3/4	6	17-3/4	2.87
P-8204	24	152	450	2000	15/16	6	17-3/4	4.41
P-8206	25	152	450	2300	1	6	17-3/4	5.07
P-8208	35	152	450	3300	1-3/8	6	17-3/4	7.28

## Punch (DIN 6458)

Poinçon  
Punzón



No.	a mm	d mm	l mm	△ g	a inch	d inch	l inch	△ lbs.
P-8501	1	9.5	120	45	3/64	3/8	4-3/4	.10
P-8502	2	13	120	45	5/64	1/2	4-3/4	.10
P-8503	3	13	120	45	1/8	1/2	4-3/4	.10
P-8504	4	13	120	90	5/32	1/2	4-3/4	.20
P-8505	5	13	120	90	3/16	1/2	4-3/4	.20
P-8506	6	13	120	90	1/4	1/2	4-3/4	.20
P-8507	7	13	120	90	9/32	1/2	4-3/4	.20
P-8508	8	13	120	90	5/16	1/2	4-3/4	.20
P-8505L	5	13	150	115	13/64	1/2	6	.25
P-8506L	6	13	150	115	1/4	1/2	6	.25
P-8507L	7	13	150	115	9/32	1/2	6	.25
P-8508L	8	13	150	115	5/16	1/2	6	.25
P-8509	9	13	150	115	3/8	1/2	6	.25
P-8510	10	13	150	115	25/64	1/2	6	.25
P-8512	12	16	150	180	15/32	5/8	6	.40
P-8513	13	19	150	180	1/2	3/4	6	.40
P-8514	14	19	150	270	9/16	3/4	6	.60
P-8516	16	19	200	500	5/8	3/4	7-3/4	1.10
P-8518	18	22	200	500	45/64	7/8	7-3/4	1.10
P-8520	20	25	200	610	25/32	1	7-3/4	1.35
P-8522	22	25	200	610	7/8	1	7-3/4	1.35

## Punch, Center

Pointeau  
Punzón de Marcar



No.	d mm	l mm	△ g	d inch	l inch	△ lbs.
P-1290	8	100	25	5/16	4	.06
P-1291	10	115	45	3/8	4-1/2	.10
P-1292	13	130	90	1/2	5	.20
P-1292A	14	70	45	9/16	4-1/4	.15
P-1293	16	150	175	5/8	6	.38
P-1294	18	140	270	11/16	5-1/2	.60
P-1295	20	160	340	3/4	6-1/4	.75
P-1296	24	205	545	15/16	8	1.20
P-1297	27	240	795	1-1/16	9-1/2	1.75