
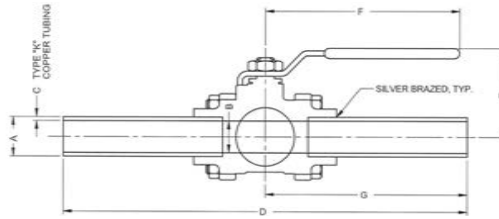


82-200/82-240 SERIES

MALE EXTENSIONS - NO GAUGE PORTS

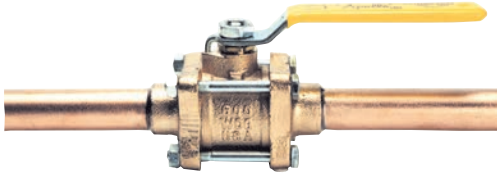


DIMENSIONS

STANDARD		OXYGEN CLEANED					SIZE (IN.)	DIMENSIONS (IN.)										WT. (LB.)
BRASS TRIM PLATED PART NUMBER	316SS BALL & STEM PART NUMBER	BRASS TRIM PLATED PART NUMBER	316SS BALL & STEM PART NUMBER	316SS BALL, STEM & EXT. TRIM PART NUMBER	BRASS TRIM PLATED PART NUMBER	316SS BALL & STEM PART NUMBER		A	B	C	D	E	LOCKING F	NON LOCKING F	G	H		
W/ NON-LOCKING HANDLE		W/ NON-LOCKING HANDLE			W/ LOCKING HANDLE													
82-203-B8	82-243-A8	82-203-K1	82-243-K1	82-243-C4	82-203-G3	82-243-G3	1/2"	5/8	0.62	0.049	13.81	2.00	4.87	5.28	6.00	5.50	1.7	
82-204-A8	82-244-B3	82-204-K1	82-244-K1	82-244-C6	82-204-G3	82-244-G3	3/4"	7/8	0.81	0.065	13.93	2.18	4.87	5.28	6.00	5.25	2.4	
82-205-B7	82-245-B1	82-205-K1	82-245-K1	82-245-E3	82-205-G3	82-245-G3	1"	1-1/8	1.00	0.065	14.04	2.62	5.50	6.25	6.00	5.09	3.4	
82-206-B7	82-246-B0	82-206-K1	82-246-K1	82-246-C0	82-206-G3	82-246-G3	1-1/4"	1-3/8	1.25	0.065	14.75	2.89	5.50	6.25	6.00	5.03	5.5	
82-207-B2	82-247-B2	82-207-K1	82-247-K1	82-247-C6	82-207-G3	82-247-G3	1-1/2"	1-5/8	1.50	0.072	15.07	3.37	8.00	8.92	6.00	4.91	8.5	
82-208-B7	82-248-B2	82-208-K1	82-248-K1	82-248-C4	82-208-G3	82-248-G3	2"	2-1/8	2.00	0.083	15.23	3.70	8.00	8.92	6.00	4.66	14.2	
82-209-A2	82-249-A2	82-209-K1	82-249-K1	-	82-209-G3	82-249-G3	2-1/2"	2-5/8	2.50	0.095	23.51	5.14	9.38	10.06	9.60	8.13	26.8	
-	82A-240-A2	-	82A-240-K1	-	-	-	3"	3-1/8	3.00	0.109	24.00	6.77	18.00*	-	9.40	7.76	42.24	
-	82A-24A-A0	-	82A-24A-K1	-	-	-	4"	4-1/8	4.00	0.134	25.50	8.26	18.00*	-	9.41	7.25	106.0	

*3" & 4" valves come standard with SS ball and stem (not optional) and adjustable length locking handles.

82-200/82-240 SERIES

FEMALE EXTENSIONS - NO GAUGE PORTS

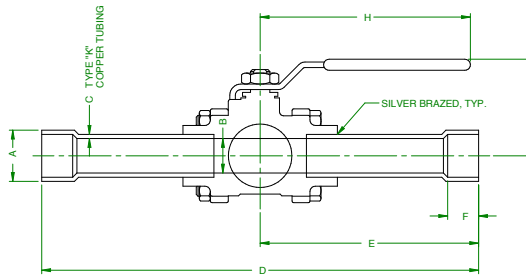

DIMENSIONS

STANDARD		OXYGEN CLEANED					SIZE (IN.)	DIMENSIONS (IN.)										WT. (LB.)
BRASS TRIM PLATED PART NUMBER	316SS BALL & STEM PART NUMBER	BRASS TRIM PLATED PART NUMBER	316SS BALL & STEM PART NUMBER	BRASS TRIM PLATED PART NUMBER	316SS BALL & STEM PART NUMBER	BRASS TRIM PLATED PART NUMBER		316SS BALL & STEM PART NUMBER	A	B	C	D	E	F	G	LOCKING H	NON LOCKING H	
W/ NON LOCKING HANDLE		W/ LOCKING HANDLE			W/ NON LOCKING HANDLE			W/ LOCKING HANDLE										
82-203-C2	82-243-B8	-	-	82-203-K2	82-243-K2	82-203-E0	82-243-E0	1/2"	5/8"	0.62	0.049	14.80	7.40	0.50	2.00	4.87	5.28	1.7
82-204-C3	82-244-C1	82-204-F0	-	82-204-K2	82-244-K2	82-204-E0	82-244-C9	3/4"	7/8"	0.81	0.065	15.42	7.71	0.75	2.18	4.87	5.28	2.4
82-205-C2	82-245-C1	82-205-G4	-	82-205-K2	82-245-K2	82-205-E4	82-245-E0	1"	1-1/8"	1.00	0.065	15.84	7.92	0.90	2.62	5.50	6.25	3.5
82-206-C1	82-246-C1	-	-	82-206-K2	82-246-K2	82-206-C7	82-246-C2	1-1/4"	1-3/8"	1.25	0.065	16.69	8.34	0.96	2.87	5.50	6.25	5.6
82-207-B8	82-247-C5	82-207-E9	-	82-207-K2	82-247-K2	82-207-C5	82-247-E3	1-1/2"	1-5/8"	1.50	0.072	16.16	8.58	1.09	3.37	8.00	8.92	8.6
82-208-C1	82-248-C0	82-208-E4	-	82-208-K2	82-248-K2	82-208-C8	82-248-C7	2"	2-1/8"	2.00	0.083	18.12	9.06	1.34	3.70	8.00	8.92	14.3
-	-	-	-	82-209-K2	82-249-K2	82-209-A8	82-249-A8	2-1/2"	2-5/8"	2.50	0.095	23.50	9.62	1.47	5.14	9.38	10.06	26.8
-	-	-	-	-	-	-	82A-240-K2	3"	3-1/8"	3.00	0.109	23.87	10.25	1.66	6.77	18.00*	-	42.25

*3" valves are equipped with adjustable length locking handles.