

Areamaster™ 250/400 Integrally Ballasted Floodlights

175 W to 400 W HID


For ordinary locations. NOT available for use in CEC governed locations.

NEC:

Rated for Ordinary (Unclassified) Locations

Order using catalog numbering guide below or select catalog number from tables on following pages.

Catalog Numbering Guide For Areamaster 250/400 Floodlights

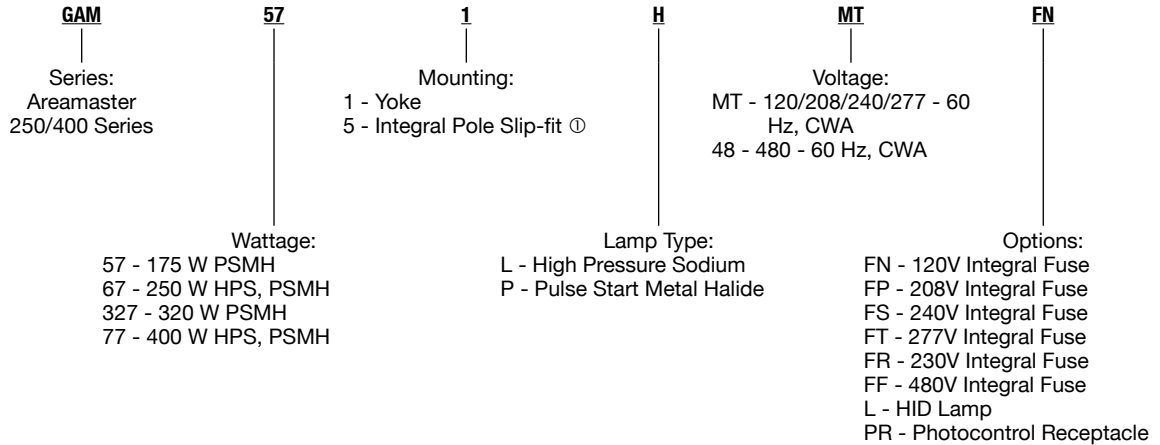

Lamp	Line Voltage	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number	
				Yoke Mount	Slip-Fit Mount ①
High Pressure Sodium					
250 W HPS	120/208/240/277	14.3 (31.5)	62.5 (3814)	G-AM671L-MT	G-AM675L-MT
	480			G-AM671L-48	G-AM675L-48
400 W HPS	120/208/240/277	16.0 (35.3)	62.5 (3814)	G-AM771L-MT	G-AM775L-MT
	480			G-AM771L-48	G-AM775L-48
Pulse Start Metal Halide					
175 W PSMH	120/208/240/277	12.9 (28.4)	62.5 (3814)	G-AM571P-MT	G-AM575P-MT
	480			G-AM571P-48	G-AM575P-48
250 W PSMH	120/208/240/277	14.3 (31.5)	62.5 (3814)	G-AM671P-MT	G-AM675P-MT
	480			G-AM671P-48	G-AM675P-48
320 W PSMH	120/208/240/277	16.0 (35.3)	62.5 (3814)	G-AM3271P-MT	G-AM3275P-MT
	480			G-AM3271P-48	G-AM3275P-48
400 W PSMH	120/208/240/277	16.0 (35.3)	62.5 (3814)	G-AM771P-MT	G-AM775P-MT
	480			G-AM771P-48	G-AM775P-48

① Slip-fits 2" or 2-1/2" pipe-size tenons.