

Power Hook for Industrial High Bay Luminaires

Furnished with Receptacle, Plug, 18" 16-3 SO Cord and Loop Fixture Hanger

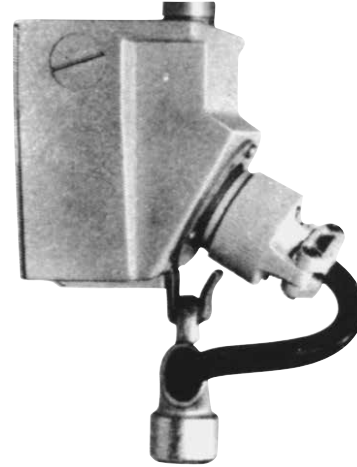
CEC:
Listed for Ordinary (Unclassified) Locations

Applications

- Designed for suspension of HID, fluorescent and incandescent lighting fixtures.

Features

- All hangers
 - All fixture hangers protect fixture against wind and vibration damage.
 - Cushion type for added protection where lighting fixtures are subjected to vibration.
- G-HBPH power hook for industrial luminaires
 - Loop that suspends fixture cannot be removed until plug is disconnected from power receptacle.
 - 20 Amp plug, receptacle and cable are provided in all voltages.
 - Rotating plug after insertion locks plug in receptacle, eliminating plug fall-out.
 - Loop and hook provide flexible mounting, ideal in areas where vibration is encountered.



Standard Materials

- Copperfree (4/10 of 1% max.) cast aluminum









Standard Finishes

- Powder coat epoxy

CEC Certifications and Compliances

- CSA Standard: C22.2 No. 9, C22.2 No. 250
- CSA Certified: 009349

POLES/HANGERS: NEC/CEC ORDINARY LOCATION FLEXIBLE FIXTURE HANGERS

	Size (Inches)	Voltage	Catalog Number
	3/4	120	G-HBPH-120
	3/4	208	G-HBPH-208
	3/4	240	G-HBPH-240
	3/4	277	G-HBPH-277
	3/4	347	G-HBPH-347
	3/4	480	G-HBPH-480
	3/4	600	G-HBPH-600
			

Appleton