

TubeRocker™ Fixed Speed Rocker (2D)



- Ideal for tube sizes 1.5ml to 50ml
- Grooved mat properly secures tubes without the need for any tools, clamps or hardware

Technical Data:

Speed Range:	Fixed, 24 rpm (230V: 20 rpm)
Tilt Angle:	±30°
Platform Size:	12 x 4.5 in. / 30 x 11.4 cm
Load Capacity:	5 lbs (2.3kg)
Operating Temp. Range:	+4° C to +45° C
Dimensions: (W x D x H)	13.3 x 5.5 x 4 in. / 33.6 x 13.5 x 10 cm
Weight:	4 lbs (1.8kg)
Electrical:	115 or 230V, 50-60Hz, 50W
Warranty:	2 Years

Ordering Information:

Item No.	Description:
M2100*	TubeRocker with grooved mat

*115V with US plug. For 230V (EU plug), please add (-E).



BenchBlotter™ Fixed Speed Rocker (2D)



BR1000 with BR1000-STACK

- Gentle mixing for blot washing and gel staining
- Optional dual platform doubles work surface

Technical Data:

Speed Range:	Fixed, 12 rpm Fixed, 10 rpm (230V)
Tilt Angle:	±8°
Platform Size:	12 x 12 in. / 30 x 30 cm
Load Capacity:	5 lbs (2.3kg)
Operating Temp. Range:	+4° C to +45° C
Dimensions: (W x D x H)	13.5 x 12 x 4.7 in. 34 x 30 x 12 cm
Stacking Clearance:	3 in. / 7.6 cm
Weight:	6.5 lbs (3kg)
Electrical:	115 or 230V, 50-60Hz, 50W
Warranty:	2 Years

Ordering Information:

Item No.	Description:
BR1000*	BenchBlotter Platform Rocker with flat mat
BR1000-STACK	Optional stacking platform with flat mat
BR1000-DIMPLED	Optional dimpled mat
B0718	Bungee cord, used for securing vessels, pack of 4

*115V with US plug. For 230V (EU plug), please add (-E).

BenchRocker™ 2D Variable Speed Rocker (2D)



- Adjustable tilt & speed for a wide range of applications
- Large 14x12" work surface
- Safe for incubator or cold room use



Optional Stacking Platform (clearance: 3")

The BenchRocker 2D is designed to provide the precise speeds and tilt angles required for a broad range of molecular and biological mixing applications. The user can adjust both parameters to match the vessel size and the volume of liquid being mixed, yielding optimum results.

Technical Data:

Speed Range:	Variable, 2 to 30 rpm
Tilt Angle:	Variable, 0° to ± 30°
Platform Size:	14 x 12 in. / 35 x 30 cm
Load Capacity:	8 lbs (3.6kg)
Operating Temp. Range:	+4° C to +45° C
Dimensions: (W x D x H)	14 x 12 x 8 in. 35 x 30 x 20 cm
Stacking Clearance:	3 in. / 7.6 cm
Weight:	7.5 lbs (3.4kg)
Electrical:	115 or 230V, 50-60Hz, 50W
Warranty:	2 Years


Ordering Information:

Item No.	Description:
BR2000*	BenchRocker™ 2D Rocker with flat mat
BR2000-STACK	Optional stacking platform (3") with flat mat
BR1000-DIMPLED	Optional dimpled mat
B0718	Bungee cord, used for securing vessels, pack of 4
BR2000-SP	STACK-PLUS Extender set, adds 1.25" clearance to stacking platform

*115V with US plug. For 230V (EU plug), please add (-E).



Everlast™ 247 Heavy Duty - Variable Speed Rocker (2D)

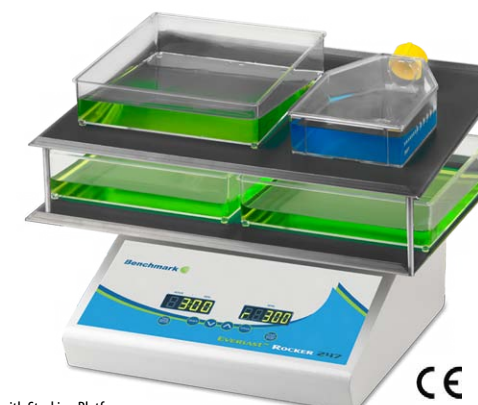

- Everlast™ 5 year warranty
- Extra-large, 16 x 12" surface
- 12 lb, load capacity
- Safe for incubator or cold room use

With an unprecedented 5 year limited warranty, Benchmark's Everlast 247 Rocker is built to last. Twenty four hours a day, seven days a week... No problem! The powerful motor and heavy-duty drive system remain reliable and consistent, even under constant usage in a cold room or incubator.

The rocking speed and tilt angle can easily be adjusted to vary between gentle and aggressive agitation. An optional stacking platform is available for doubling the work surface.

Pictured with Stacking Platform (BR5000-STACK)

Technical Data:

Speed Range:	Variable, 5 to 80 rpm
Tilt Angle:	Adjustable, 6° to ± 22°
Timer:	1 min. to 100 hrs., increments by 1 min. or continuous
Platform Size:	16 x 12 in. / 40.5 x 30 cm
Load Capacity:	12lbs (5.45kg)
Operating Temp. Range:	+0° C to +50° C
Dimensions: (W x D x H)	16 x 13.5 x 8 in. 34.2 x 40.6 x 20.3 cm
Stacking Clearance:	3.5 in. / 8.9cm
Weight:	20 lbs (9kg)
Electrical:	115 or 230V, 50-60Hz, 50W
Warranty:	5 Years

Ordering Information:

Item No.	Description:
BR5000*	Everlast™ 247 Rocker with flat mat
BR5000-STACK	Optional stacking platform with flat mat with 3.5" clearance
B0718	Bungee cord, used for securing vessels, pack of 4

*115V with US plug. For 230V (EU plug), please add (-E).