



## Standard Features

- Self leveling design automatically keeps the top of the load at a convenient working height to help eliminate bending and improve productivity
- Integral rotator ring helps eliminate reaching and stretching
- Captive air operation eliminates cumbersome mechanical springs and gives more controlled (dampened) movement of the platform
- A three position EZ Adjust knob allows adjustment of the collapsed capacity without changing air pressure
- Secured ball bearing center pivot of the 43" diameter rotator ring provides smooth, even rotation
- Pressure relief valve prevents excess pressure build-up
- Surfaces are phosphatized and powder coated with a high quality polyester for a lasting, durable finish
- Rollers are entrapped in the base frame and platform for added stability
- A full coverage finger guard eliminates pinch points between the rotator underside of the rotator ring and the bearings
- Integral maintenance blocks
- EZ Loaders arrive at your facility fully assembled - just add air!
- Easily transported with a fork truck or via optional portability packages
- The EZ Loader is CE marked under the Machinery Directive (2006/42/EC)


**"Attention to detail and worker safety is paramount"**



*Unique Patent-Pending, Self-Contained Pneumatic System Offers Unsurpassed Performance*



*EZ-Adjust Knob Provides Up To 1200 lbs Of Capacity Adjustment With the Turn of a Knob*

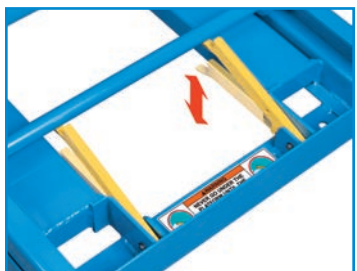

*Hinged Maintenance Bars For Added Safety*



*Rollers Are Entrapped In The Base Frame And Platform For Added Stability*

**The Bishamon EZ-Loader Complies With All Machinery Directive 2006/42/EC Safety Requirements - And Is CE Approved!**

## EZ Loader Models

<b>EZ LOADER</b>	Standard powder coated finish
<b>EZ LOADER-E</b>	FDA compliant powder coated finish with stainless solid round top
<b>EZ LOADER-SS</b>	Grade 304 stainless steel with electro-polished finish
<b>EZ LOADER-2848</b>	Fixed non-rotating platform 28" x 48"
<b>EZ LOADER-3648</b>	Fixed non-rotating platform 36" x 48"



## EZ Loader Accessories

<b>EZ-BRK</b>	Rotator ring brake to prevent rotation
<b>EZ-ABS</b>	Accordion bellows skirting with frame
<b>EZ-SLP</b>	Semi-live portability for moving unloaded lift (2 wheels & dolly handle)
<b>EZ-CART</b>	Cart portability with 2 swivel and 2 rigid wheels (add 7" to lowered height)
<b>EZ-SRT</b>	Solid 43" diameter round top
<b>EZ-4444</b>	Oversize rectangular rotating platform (44"x44")
<b>EZ-4448</b>	Oversize rectangular rotating platform (44"x48")
<b>EZ-4848</b>	Oversize rectangular rotating platform (48"x48")
<b>EZ-SRT-DNT</b>	Solid 43" diameter round top with 90 degree detents
<b>EZ-4444-DNT</b>	Oversize rectangular rotating platform (44"x44") with 90 degree detents
<b>EZ-4448-DNT</b>	Oversize rectangular rotating platform (44"x48") with 90 degree detents
<b>EZ-4848-DNT</b>	Oversize rectangular rotating platform (48"x48") with 90 degree detents



*Brake prevents rotator ring from turning*



*Accordion bellows skirting*



*Cart portability with 2 swivel and 2 fixed caster wheels*



*Solid rotating top*



*Oversize rotating platform*



*Easily moved with a fork truck*