

SPECIFICATIONS



94100, 941RC, and 94170 Series
Band 0.025 in. Thick x 0.75 in. Wide

ZINC PLATED T-BOLT AND LOCKNUT

Maximum Torque 90 in.-lbs. (dry)

ENGLISH (inches)					
STANDARD T-BOLT NO.	CHANNEL TONGUE NO.	FLOATING BRIDGE NO.	NOMINAL DIAMETER	MINIMUM DIAMETER	MAXIMUM DIAMETER
94100-0125	941RC-0125	94170-0125	1.25	1.11	1.25
94100-0150	941RC-0150	94170-0150	1.50	1.36	1.50
94100-0162	941RC-0162	94170-0162	1.62	1.48	1.62
94100-0175	941RC-0175	94170-0175	1.75	1.62	1.87
94100-0188	941RC-0188	94170-0188	1.88	1.75	2.00
94100-0200	941RC-0200	94170-0200	2.00	1.87	2.12
94100-0212	941RC-0212	94170-0212	2.12	1.93	2.24
94100-0225	941RC-0225	94170-0225	2.25	2.06	2.37
94100-0238	941RC-0238	94170-0238	2.38	2.19	2.50
94100-0250	941RC-0250	94170-0250	2.50	2.31	2.62
94100-0256	941RC-0256	94170-0256	2.56	2.37	2.68
94100-0262	941RC-0262	94170-0262	2.62	2.43	2.74
94100-0275	941RC-0275	94170-0275	2.75	2.56	2.87
94100-0288	941RC-0288	94170-0288	2.88	2.66	2.97
94100-0300	941RC-0300	94170-0300	3.00	2.78	3.09
94100-0312	941RC-0312	94170-0312	3.12	2.90	3.21
94100-0325	941RC-0325	94170-0325	3.25	3.03	3.34
94100-0350	941RC-0350	94170-0350	3.50	3.28	3.59
94100-0362	941RC-0362	94170-0362	3.62	3.40	3.71
94100-0375	941RC-0375	94170-0375	3.75	3.53	3.84
94100-0388	941RC-0388	94170-0388	3.88	3.66	3.97
94100-0400	941RC-0400	94170-0400	4.00	3.78	4.09
94100-0425	941RC-0425	94170-0425	4.25	4.03	4.34
94100-0438	941RC-0438	94170-0438	4.38	4.16	4.47
94100-0450	941RC-0450	94170-0450	4.50	4.28	4.59
94100-0475	941RC-0475	94170-0475	4.75	4.53	4.84
94100-0500	941RC-0500	94170-0500	5.00	4.78	5.09
94100-0550	941RC-0550	94170-0550	5.50	5.28	5.59
94100-0600	941RC-0600	94170-0600	6.00	5.78	6.09
94100-0625	941RC-0625	94170-0625	6.25	6.03	6.34
94100-0650	941RC-0650	94170-0650	6.50	6.28	6.59
94100-0700	941RC-0700	94170-0700	7.00	6.78	7.09
94100-0750	941RC-0750	94170-0750	7.50	7.28	7.59
94100-0766	941RC-0766	94170-0766	7.66	7.44	7.75

S = Stock Items

94106, 94166, and 941QA Series
Band 0.025 in. Thick x 0.75 in. Wide

STAINLESS STEEL T-BOLT AND LOCKNUT

Maximum Torque 75 in.-lbs. (dry)

ENGLISH (inches)					
STANDARD T-BOLT NO.	CHANNEL TONGUE NO.	FLOATING BRIDGE NO.	NOMINAL DIAMETER	MINIMUM DIAMETER	MAXIMUM DIAMETER
94106-0125	94166-0125	941QA-0125	1.25	1.11	1.25
94106-0138	94166-0138	941QA-0138	1.38	1.24	1.38
94106-0150	94166-0150	941QA-0150	1.50	1.36	1.50
94106-0162	94166-0162	941QA-0162	1.62	1.48	1.62
94106-0175	94166-0175	941QA-0175	1.75	1.62	1.87
94106-0188	94166-0188	941QA-0188	1.88	1.75	2.00
94106-0200	94166-0200	941QA-0200	2.00	1.87	2.12
94106-0212	94166-0212	941QA-0212	2.12	1.93	2.24
94106-0225	94166-0225	941QA-0225	2.25	2.06	2.37
94106-0238	94166-0238	941QA-0238	2.38	2.19	2.50
94106-0250	94166-0250	941QA-0250	2.50	2.31	2.62
94106-0256	94166-0256	941QA-0256	2.56	2.37	2.68
94106-0262	94166-0262	941QA-0262	2.62	2.43	2.74
94106-0275	94166-0275	941QA-0275	2.75	2.56	2.87
94106-0288	94166-0288	941QA-0288	2.88	2.66	2.97
94106-0300	94166-0300	941QA-0300	3.00	2.78	3.09
94106-0312	94166-0312	941QA-0312	3.12	2.90	3.21
94106-0325	94166-0325	941QA-0325	3.25	3.03	3.34
94106-0350	94166-0350	941QA-0350	3.50	3.28	3.59
94106-0375	94166-0375	941QA-0375	3.75	3.53	3.84
94106-0400	94166-0400	941QA-0400	4.00	3.78	4.09
94106-0425	94166-0425	941QA-0425	4.25	4.03	4.34
94106-0450	94166-0450	941QA-0450	4.50	4.28	4.59
94106-0475	94166-0475	941QA-0475	4.75	4.53	4.84
94106-0500	94166-0500	941QA-0500	5.00	4.78	5.09
94106-0525	94166-0525	941QA-0525	5.25	5.03	5.34
94106-0550	94166-0550	941QA-0550	5.50	5.28	5.59
94106-0575	94166-0575	941QA-0575	5.75	5.53	5.84
94106-0600	94166-0600	941QA-0600	6.00	5.78	6.09
94106-0650	94166-0650	941QA-0650	6.50	6.28	6.59
94106-0700	94166-0700	941QA-0700	7.00	6.78	7.09
94106-0750	94166-0750	941QA-0750	7.50	7.28	7.59

S = Stock Items



Now stocking Zinc Plated and Stainless Steel T-Bolt and Locknut Clamp sizes for quick shipment!

When performance is critical – specify Clampco T-Bolt Band Clamps!


Clampco stock T-Bolt Band Clamps feature all 300 series stainless steel bands and trunnions.

Hardware options include:

- Zinc Plated (1/4-28 T-Bolts and Locknuts)
- Stainless Steel (1/4-28 T-Bolts and Locknuts)
- Additional Fastener Sizes and Materials Available

How to order:

Measure the O.D. of your final hose assembly. Select the T-Bolt Band Clamp with the closest nominal diameter.

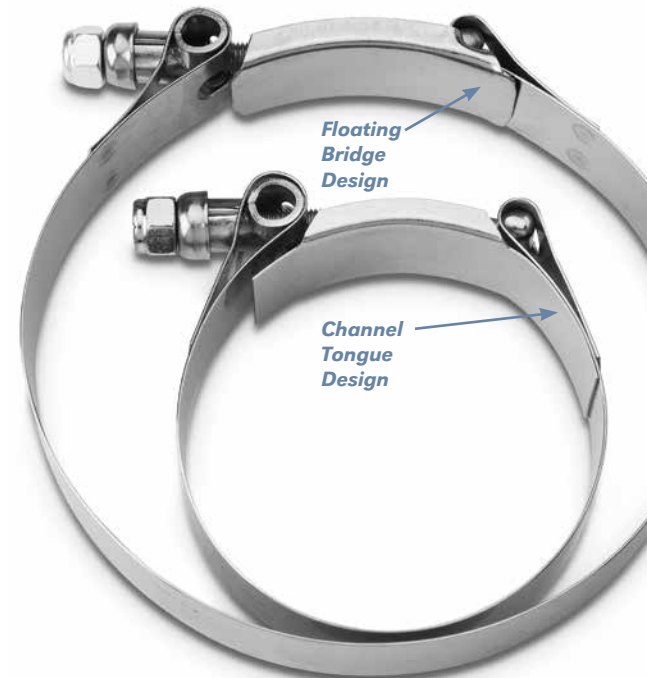

NOTE:

See page 12 for Stock Marine Grade Clamps.