


PURE FLOW SERIES BREATHING AIR & CLEAN FLUID HOSE REELS

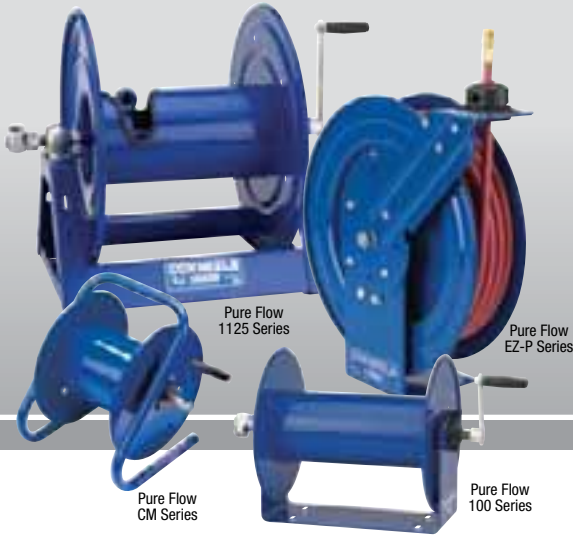

COXREELS® Pure Flow Series is offered in spring rewind, hand crank and motorized retractions. All Pure Flow hose reels come standard equipped with stainless steel air/fluid paths and stainless steel swivels with non-toxic, food quality grease, ensuring clean, non-contaminated, safe and reliable transfer of breathing air, potable water or other clean fluids.

PURE FLOW EZ-P SERIES

Models with hose are for air or water service with a maximum temperature 65° C. Models less hose can be used for air, water or oil. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

LESS HOSE						SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	
EZ-P-BLL-350	10	16	15	21	20	1
EZ-P-BHL-350	10	16	15	414	20	1

PURE FLOW EZ-T SERIES

Models with hose are for air or water service with a maximum temperature 65° C. Models less hose can be used for air, water or oil. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

LESS HOSE						SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	
EZ-T-BLL-3100	10	16	30	21	39	2
EZ-T-BHL-3100	10	16	30	414	39	2

PURE FLOW SERIES: REEL SPECIFICATIONS

SWIVEL

- Non-corrosive stainless steel air/fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease

DESIGN & STRUCTURE

- Safely store respiratory air hose lines for low or high pressure breathing air systems
- Safely store potable water hose lines for drinking water systems
- Safely store any hose requiring sanitized & non-contaminated fluid transfer application
- Each of these reels is built of their standard series with their own unique features & benefits

RETRACTION

- See page 11 for P Series retraction features
- See page 13 for T Series retraction features
- See page 36 for 100 Series retraction features
- See page 37 for CM Series retraction features
- See page 40 for 1125 Series retraction features

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Low Pressure Breathing Air Systems
- High Pressure Breathing Air Systems
- Fire Rescue
- Medical & Hospital Air Services
- Mining/Tunneling Operations
- Pharmaceutical Manufacturing
- Marine/Docks/Offshore
- High Pressure Cylinder Filling (SCUBA/SCBA)
- Shot Blasting
- Tank Cleaning
- Spray Painting
- Hazardous Site Cleanup
- Commercial Kitchens
- Pre-Rinse
- Potable Water
- Bulk Food
- Food Grade Washdown
- Food & Chemical Processing Plants

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

PURE FLOW 100 SERIES

LESS HOSE						SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	
112P-3-8	10	16	30	276	9	3

PURE FLOW CM SERIES

LESS HOSE						SIZE INDEX
MODEL	I.D. mm	O.D. mm	LENGTH m	BAR	Kg.	
112P-3-8-CM	10	16	30	276	8	3

PURE FLOW 1125 SERIES

LESS HOSE									SIZE INDEX	
MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	BAR		Kg.
	I.D. mm	O.D. mm	LENGTH m	I.D. mm	O.D. mm	LENGTH m				
1125P-4-6	13	22	30	10	19	43	13 mm F NPT	414	16	4
1125P-4-8	13	22	46	10	19	61	13 mm F NPT	414	17	5
1125P-4-12	13	22	61	10	19	91	13 mm F NPT	414	18	6

MOTOR OPTIONS

When ordering, suffix the model number with selection below. *Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. Kg.*
A	AIR - #4 GAST	COMP. AIR MOTOR	4
E	ELEC. - 12V DC	1/3 HP REV. REV. TYPE	6
EB	ELEC. - 24V DC	1/2 HP REV. REV. TYPE	12
ED	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REV. REV. TYPE	12
EA	ELEC. - EXPL. PRF.	115V 1/2 HP REV., AC REV. TYPE	12
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	3

REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W mm		H mm			L mm	X mm	Y mm		M mm	N mm	Ø mm	Dw mm
	CRANK / ELEC / SPRING	AIR / HYD.	CRANK / SPRING	MOTOR	CRANK / SPRING			MOTOR					
1	181	-	473	-	435	152	152	-	102	127	283	95	
2	238	-	648	-	610	203	229	-	178	203	3829	114	
3	464	-	330	-	305	241	152	-	140	76	140	203	
4	502	432	473	489	448	289	391	406	240	254	159	152	
5	552	483	473	489	448	340	391	406	290	254	159	203	
6	654	584	473	489	448	441	391	406	392	254	159	305	

Overall Dimensions Base Mounting Pattern Drum

- See page 11 For P Series dim drawing
- See page 13 For T Series dim drawing
- See page 54 For 100 Series dim drawing
- See page 55 For CM Series dim drawing
- See page 58 For 1125 Series dim drawing



SPRING DRIVEN

HAND CRANK