COXREELS® T Series "Truck Mount" spring driven hose reels are the toughest hose reels in the spring driven line. The extra large chassis with dual pedestal-style arms and Coxreels' Super Hub™ provides triple axle support while reducing vibration and strengthening the structural integrity of the reel. Making it perfect for on and off-road applications that demand reliability in the most abusive and demanding environments.

Triple axle support with a full frame & Super Hub™

T SERIES

Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	EZ-COIL MODELS	MODEL	APRX. LBS.	
LOW PRESSURE	Models with hose are for air water service with a maximum temperature 150°F. Models less hose can be used for air, water or oil.								
TSH-N-350	3/8"	5/8"	50	300	61	**EZ-TSH-350**	**TSHL-N-350**	55	**1**
TSH-N-375	3/8"	5/8"	75	300	82	**EZ-TSH-375**	**TSHL-N-375**	73	**2**
TSH-N-3100	3/8"	5/8"	100	300	85	**EZ-TSH-3100**	**TSHL-N-3100**	74	**2**
TSH-N-3125	3/8"	5/8"	125	300	103	-	**TSHL-N-3125**	90	**2**
TSH-N-450	1/2"	3/4"	50	300	63	**EZ-TSH-450**	**TSHL-N-450**	55	**1**
TSH-N-475	1/2"	3/4"	75	300	82	**EZ-TSH-475**	**TSHL-N-475**	71	**2**
TSH-N-4100	1/2"	3/4"	100	300	95	**EZ-TSH-4100**	**TSHL-N-4100**	80	**2**
TSH-N-535	3/4"	1 1/16"	35	300	77	**EZ-TSH-535**	**TSHL-N-535**	67	**3**
TSH-N-550	3/4"	1 1/16"	50	300	83	**EZ-TSH-550**	**TSHL-N-550**	70	**3**
TSH-N-575	3/4"	1 1/16"	75	300	93	-	**TSHL-N-575**	73	**4**
TSH-N-635	1"	1 1/2"	35	300	92	-	**TSHL-N-635**	71	**5**
TSH-N-650	1"	1 1/2"	50	300	98	-	**TSHL-N-650**	77	**4**
MEDIUM PRESSURE	Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum Temperature 250°F.								
TMP-N-350	3/8"	11/16"	50	3,000	74	**EZ-TMP-350**	**TMPL-N-350**	61	**1**
TMP-N-375	3/8"	11/16"	75	3,000	99	**EZ-TMP-375**	**TMPL-N-375**	80	**2**
TMP-N-3100	3/8"	11/16"	100	3,000	106	-	**TMPL-N-3100**	82	**2**
TMP-N-450	1/2"	13/16"	50	2,500	77	**EZ-TMP-450**	**TMPL-N-450**	64	**1**
TMP-N-475	1/2"	13/16"	75	2,500	100	**EZ-TMP-475**	**TMPL-N-475**	80	**2**
TMP-N-4100	1/2"	13/16"	100	2,500	106	-	**TMPL-N-4100**	80	**2**
TMP-N-525	3/4"	1 1/16"	25	1,500	67	-	**TMPL-N-525**	57	**6**
TMP-N-535	3/4"	1 1/16"	35	1,500	88	-	**TMPL-N-535**	74	**3**
TMP-N-550	3/4"	1 1/16"	50	1,500	94	**EZ-TMP-550**	**TMPL-N-550**	74	**3**
TMP-N-575	3/4"	1 1/16"	75	1,500	100	-	**TMPL-N-575**	77	**7**
TMP-N-650	1"	1 3/8"	50	1,250	116	-	**TMPL-N-650**	81	**7**
HIGH PRESSURE	Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum Temperature 250°F.								
THP-N-150	1/4"	9/16"	50	5,000	74	**EZ-THP-150**	**THPL-N-150**	62	**1**
THP-N-175	1/4"	9/16"	75	5,000	88	**EZ-THP-175**	**THPL-N-175**	71	**2**
THP-N-1100	1/4"	9/16"	100	5,000	104	**EZ-THP-1100**	**THPL-N-1100**	82	**2**
THP-N-350	3/8"	11/16"	50	4,000	78	**EZ-THP-350**	**THPL-N-350**	66	**1**
THP-N-375	3/8"	11/16"	75	4,000	98	**EZ-THP-375**	**THPL-N-375**	80	**2**

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	9 3/8"	21 1/4"	19 1/2"	8"	9"	7"	8"
2	9 3/8"	25 1/2"	24"	8"	9"	7"	8"
3	9 7/8"	25 1/2"	24"	8"	9"	7"	8"
4	12"	25 1/2"	24"	8"	9"	7"	8"
5	10"	25 1/2"	24"	8"	9"	7"	8"
6	9 7/8"	21 7/8"	20 3/8"	8"	9"	7"	8"
7	12 1/2"	25 1/2"	24"	8"	9"	7"	8"
	Overall Dimensions			Base		Mounting Pattern	

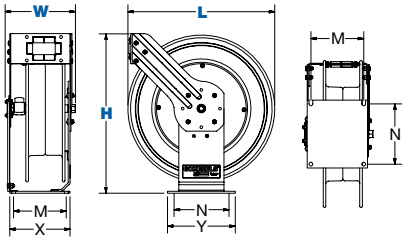

T SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Electroless nickel plated steel swivel on 1" models
- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ triple axle support system
- Built for rugged mobile applications
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Stainless Steel rollers on 3/4" & 1" models
- Solid one piece, heavy gauge 1/4" steel base & support posts for maximum strength
- 1" solid steel axle & lubricated precision bearings for smooth rotation

RETRACTION

- Controlled retraction speed up to 80% slower on EZ-COIL models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Fuel Delivery
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants
- Lube Skids & Trucks
- Service / Mechanic / Utility Vehicles
- Mining, Construction & Railroad Operations
- Automotive, Fleet & Aircraft Maintenance

ACCESSORIZE YOUR REEL :: PG 56

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

WARNING: Cancer and reproductive Harm – See page 63 for more information – www.P65Warning.ca.gov