

Air-Purifying Type

Common Features of FA-430 and FA-431

Quiet operation and powerful suction


	FA-430/431		Previous model (HAKKO 421)	
	Noise level dB (A)	Air volume m ³ /min.	Noise level dB (A)	Air volume m ³ /min.
HIGH	53	4.7	60*	3.2*
MEDIUM	50	3.7		
LOW	44	2.8		

*Values measured when the unit was used with a 60 Hz power supply.

Flexible ducts and compact body for perfect placement




Movement of smoke is affected by the surrounding environment

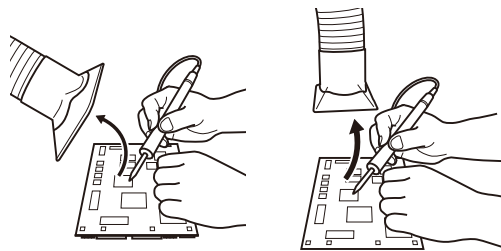

If the duct is mounted at an angle above the workpiece, it is affected by air conditioning.

If the duct is mounted directly above, it can be difficult to see the workpiece.

Recommended angle



Duct is mounted on the worktable to provide excellent suction performance.

Freestanding ducts



Perfect placement provides suction where you need it.

Option

Part No.	Name	Specifications
C1571	Duct Set	With rectangular nozzle
C1572	Duct Set	With round nozzle
A5035	Sub-filter	For FA-431, set of 5
A5036	Sub-filter for rectangular nozzle	For FA-431, set of 20
A5037	Sub-filter for round nozzle	For FA-431, set of 20
B5146	Filter case for rectangular nozzle	For FA-431
B5147	Filter case for round nozzle	For FA-431




No.C1571



No.C1572



1: No.A5035



2: No.A5036
3: No.B5146



4: No.A5037
5: No.B5147