


Spill Containment Indoor/Outdoor Drum Caddy, Fits 55 Gallon Drums, EcoPolyBlend™, Black - 28665

Product Images

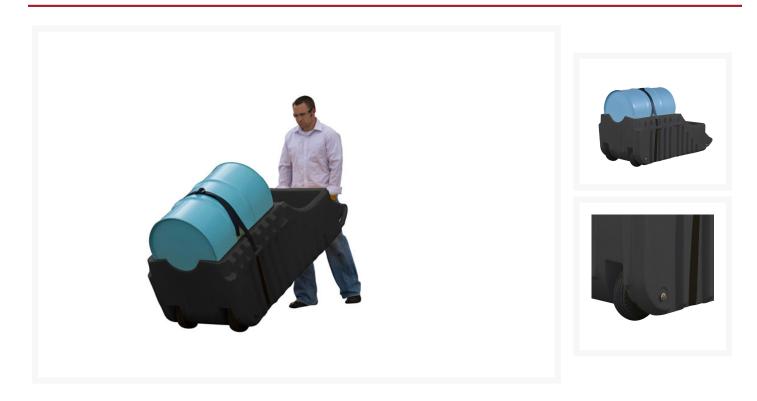

Short Description

- Convenient drum handling and dispensing with built-in spill containment
- Compliance with NFPA 30, OSHA, EPA, SPCC, and fire codes
- Portable, ergonomic design
- Sump capacity of 66 gal (250 L)
- Made from 100% post-consumer recycled polyurethane

Description

1

The Justrite EcoPolyBlend Spill Containment Indoor/Outdoor Caddy (model 28665) is a portable unit with wheels that allows one person to easily transport a full 55-gal (200-L) drum.

The ergonomically designed caddy measures 2 in W \times 26 in H \times 72 in D (813 mm W \times 660 mm H \times 1829 mm D), with two tension straps to hold drums securely in place. A 66 gal (250-L) spill sump contains chemical spills, eliminating hazards and hassles. The exclusive open-view sump design makes cleanup simple and quick, and the durable, 100% recycled black polyethylene construction provides maximum corrosion resistance and leakproof protection.

With a net weight of 120.0 lb (54.4 kg) and a safe allowable uniform distributed load of 1250 lb (567 kg) based on a service temperature range of -30°F to 120°F (-39°C to 49°C), this caddy is extremely sturdy. It is EPA, SPCC, NFPA 30, OSHA, EPA, and SPCC compliant and meets fire codes.

Why do you need it??

Drums need to be moved — and they should be moved in the safest and easiest manner. Using a caddy not only allows for convenient, ergonomic movement with ease, but it easily accommodates a full leak from a 55 gal drum, with simple cleanup from the open-view sump.

This is more than just a hand truck for drums or barrels. Model 28665 serves as a specialized apparatus that makes it easy to move drums on and off spill pallets. Using a caddy improves safety for employees and others, by minimizing injuries and negating unnecessary spills.

2

Specifications

Model No	28665
UPC	697841134515
International Model No.	28665
Color	Black
Material Specifications	Recycled Polyethylene
UL Environmental Approval	Yes
Complies with NFPA Code 30	Yes
OSHA Compliance	Yes
EPA Compliance	Yes
SPCC Compliance	Yes
Percent Recycled	100
Sump Capacity - Gallons	66
Sump Capacity - liters	250
Load Bearing Capacity, lbs	1250
Load Bearing Capacity, kg	567
Dimensions, Exterior	26" H x 32" W x 72" D
	660mm H x 813mm W x 1829mm D
Net Weight, lbs	120.0
Net Weight, kg	54.4

7/21/23