

Schedule 80 PVC Industrial Products & Accessories
True Union 2000 Industrial Retrofit Ball Valves - Replaces Other Brand Valves



Industrial Valve

Complete universal replacement valve for domestic and import PVC valve. See separate catalog listing for retrofit replacement of older Spears® valves.


Retrofit valve consists of Spears® Industrial True Union 2000 Ball Valve supplied with factory installed extended-socket end connectors. Simply cut out old valve to specified dimensions and install Retrofit Valve end connectors.

Pressure Rating @ 73°F (23°C), Water
 1/2" - 4" = 235 psi

All Valves Assembled with Silicone-Free,
 Water Soluble Lubricant

Suitable for Vacuum Service


Retrofit End Connector Sets without
 valve are also available - See
 Ball Valve Accessories & Repair Kits

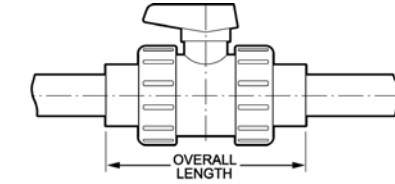

**BALL VALVE FOR
 REPLACEMENT**



**PIPE LAYING LENGTH
 AFTER CUTTING**

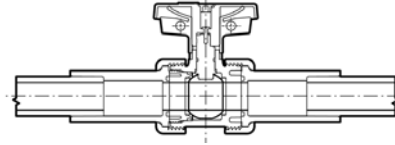

**TRUE UNION 2000
 INDUSTRIAL BALL
 VALVE INSTALLED
 WITH RETROFIT KIT**

Size	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4
L	4-29/32	5-7/16	6-3/32	7-1/4	7-1/2	8-17/32	10-3/4	11-7/16	14-15/16

PVC - Socket Ends

Size	EPDM	Viton®	Std Pk	Mstr Pk	Disc Code
1/2	1822R-005 47.21	1832R-005 52.51	1	18	600
3/4	1822R-007 55.86	1832R-007 62.14	1	18	600
1	1822R-010 66.52	1832R-010 74.09	1	12	600
1-1/4	1822R-012 92.02	1832R-012 117.46	1	8	600
1-1/2	1822R-015 110.84	1832R-015 123.04	1	8	600
2	1822R-020 146.26	1832R-020 161.06	1	4	600
2-1/2	1822R-025 281.15	1832R-025 380.96	1	0	601
3	1822R-030 370.67	1832R-030 411.86	1	0	601
4	1822R-040 626.28	1832R-040 695.87	1	0	601



Thermoplastic Valves
True Union 2000 Industrial Retrofit Ball Valves - Replaces Other Brand Valves



Industrial Valve

Complete universal replacement valve for domestic and import PVC or CPVC valve. See separate catalog listing for retrofit replacement of older Spears® valves.


Retrofit valve consists of Spears® Industrial True Union 2000 Ball Valve supplied with factory installed extended-socket end connectors. Simply cut out old valve to specified dimensions and install Retrofit Valve end connectors.

Pressure Rating @ 73°F (23°C), Water
 1/2" - 4" = 235 psi

All Valves Assembled with Silicone-Free, Water Soluble Lubricant

Suitable for Vacuum Service

Retrofit End Connector Sets without valve are also available - See Ball Valve Accessories & Repair Kits

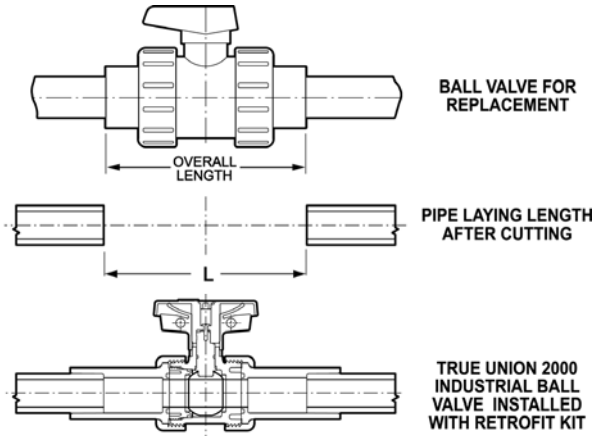

Size	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4
L	4-29/32	5-7/16	6-3/32	7-1/4	7-1/2	8-17/32	10-3/4	11-7/16	14-15/16

PVC - Socket Ends

Size	EPDM	Viton®	Std Pk	Mstr Pk	Disc Code
1/2	1822R-005 47.21	1832R-005 52.51	1	18	600
3/4	1822R-007 55.86	1832R-007 62.14	1	18	600
1	1822R-010 66.52	1832R-010 74.09	1	12	600
1-1/4	1822R-012 92.02	1832R-012 117.46	1	8	600
1-1/2	1822R-015 110.84	1832R-015 123.04	1	8	600
2	1822R-020 146.26	1832R-020 161.06	1	4	600
2-1/2	1822R-025 281.15	1832R-025 380.96	1	0	601
3	1822R-030 370.67	1832R-030 411.86	1	0	601
4	1822R-040 626.28	1832R-040 695.87	1	0	601

CPVC - Socket Ends

Size	EPDM	Viton®	Std Pk	Mstr Pk	Disc Code
1/2	1822R-005C 62.35	1832R-005C 69.28	1	18	602
3/4	1822R-007C 78.52	1832R-007C 87.27	1	18	602
1	1822R-010C 93.48	1832R-010C 103.86	1	12	602
1-1/4	1822R-012C 148.61	1832R-012C 165.17	1	8	602
1-1/2	1822R-015C 156.95	1832R-015C 174.39	1	8	602
2	1822R-020C 209.90	1832R-020C 241.30	1	4	602
2-1/2	1822R-025C 470.62	1832R-025C 522.88	1	0	603
3	1822R-030C 550.26	1832R-030C 611.45	1	0	603
4	1822R-040C 997.11	1832R-040C 1107.88	1	0	603