

Schedule 80 CPVC Industrial Products & Accessories
True Union 2000 Industrial Retrofit Ball Valves - Replaces Spears® "Regular Style" Valves



Industrial Valve

Complete replacement valve for older Spears® 2300 Series Regular True Union Ball Valves. See separate catalog listing for replacement of other brand valves.

Retrofit valve consists of Spears® Industrial True Union 2000 Ball Valve supplied with factory installed extended-socket end connectors. Simply cut out old valve to specified dimensions and install Retrofit Valve end connectors.


Pressure Rating @ 73°F (23°C),
Water

1/2" - 4" 235 psi

All Valves Assembled with Silicone-Free,
Water Soluble Lubricant

Suitable for Vacuum Service


Retrofit End Connector Sets without valve are also available - See Ball Valve Accessories & Repair Kits

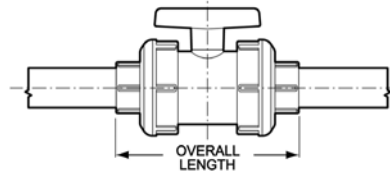

BALL VALVE FOR REPLACEMENT



PIPE LAYING LENGTH AFTER CUTTING

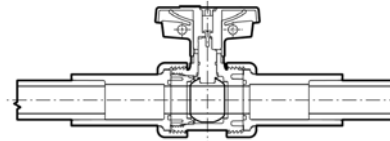

TRUE UNION 2000 INDUSTRIAL BALL VALVE INSTALLED WITH RETROFIT KIT

Size	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4
L	5-5/16	6-1/4	6-11/16	7-1/8	8-3/16	8-15/16	12	12-1/16	13-3/16

CPVC - Socket Ends

Size	EPDM	Viton®	Std Pk	Mstr Pk	Disc Code
1/2	1822RS-005C 62.35	1832RS-005C 69.28	1	18	602
3/4	1822RS-007C 78.52	1832RS-007C 87.27	1	18	602
1	1822RS-010C 93.48	1832RS-010C 103.86	1	12	602
1-1/4	1822RS-012C 148.61	1832RS-012C 165.17	1	8	602
1-1/2	1822RS-015C 156.95	1832RS-015C 174.39	1	8	602
2	1822RS-020C 209.90	1832RS-020C 241.30	1	4	602
2-1/2	1822RS-025C 470.62	1832RS-025C 522.88	1	0	603
3	1822RS-030C 550.26	1832RS-030C 611.45	1	0	603
4	1822RS-040C 997.11	1832RS-040C 1107.88	1	0	603

Thermoplastic Valves
True Union 2000 Industrial Retrofit Ball Valves - Replaces Spears® "Regular Style" Valves



Industrial Valve

Complete replacement valve for older Spears® 2300 Series Regular True Union Ball Valves. See separate catalog listing for replacement of other brand valves.


Retrofit valve consists of Spears® Industrial True Union 2000 Ball Valve supplied with factory installed extended-socket end connectors. Simply cut out old valve to specified dimensions and install Retrofit Valve end connectors.

Pressure Rating @ 73°F (23°C), Water
 1/2" - 4" 235 psi

All Valves Assembled with Silicone-Free, Water Soluble Lubricant

Suitable for Vacuum Service


Retrofit End Connector Sets without valve are also available - See Ball Valve Accessories & Repair Kits

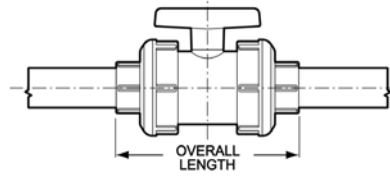

BALL VALVE FOR REPLACEMENT



PIPE LAYING LENGTH AFTER CUTTING

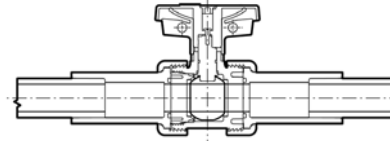

TRUE UNION 2000 INDUSTRIAL BALL VALVE INSTALLED WITH RETROFIT KIT

Size	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4
L	5-5/16	6-1/4	6-11/16	7-1/8	8-3/16	8-15/16	12	12-1/16	13-3/16

PVC - Socket Ends

Size	EPDM	Viton®	Std Pk	Mstr Pk	Disc Code
1/2	1822RS-005 47.21	1832RS-005 52.51	1	18	600
3/4	1822RS-007 55.86	1832RS-007 62.14	1	18	600
1	1822RS-010 66.52	1832RS-010 74.09	1	12	600
1-1/4	1822RS-012 92.02	1832RS-012 117.46	1	8	600
1-1/2	1822RS-015 110.84	1832RS-015 123.04	1	8	600
2	1822RS-020 146.26	1832RS-020 161.06	1	4	600
2-1/2	1822RS-025 281.15	1832RS-025 380.96	1	0	601
3	1822RS-030 370.67	1832RS-030 411.86	1	0	601
4	1822RS-040 626.28	1832RS-040 695.87	1	0	601

CPVC - Socket Ends

Size	EPDM	Viton®	Std Pk	Mstr Pk	Disc Code
1/2	1822RS-005C 62.35	1832RS-005C 69.28	1	18	602
3/4	1822RS-007C 78.52	1832RS-007C 87.27	1	18	602
1	1822RS-010C 93.48	1832RS-010C 103.86	1	12	602
1-1/4	1822RS-012C 148.61	1832RS-012C 165.17	1	8	602
1-1/2	1822RS-015C 156.95	1832RS-015C 174.39	1	8	602
2	1822RS-020C 209.90	1832RS-020C 241.30	1	4	602
2-1/2	1822RS-025C 470.62	1832RS-025C 522.88	1	0	603
3	1822RS-030C 550.26	1832RS-030C 611.45	1	0	603
4	1822RS-040C 997.11	1832RS-040C 1107.88	1	0	603