

**Schedule 80 PVC Industrial Products & Accessories
True Union 2000 Industrial 3-Way Ball Valves**




Pressure Rating @ 73°F (23°C), Water
 1/2" - 2" 235 psi
 2-1/2" - 4" 150 psi
 Flanged 150 psi
 Maximum Service Temperature
 PVC = 140°F (60°C)

Temperature/Pressure De-ratings Apply
 Vertical 3-Way or Horizontal Diverter Design
 (No Branch Shut-off)

All Standard Carton Quantities are one
 All Valves assembled with Silicone-Free,
 Water Soluble Lubricant

See Ball Valve Accessories & Repair Kits Section
 for Additional Options and Features

Ball Port Options

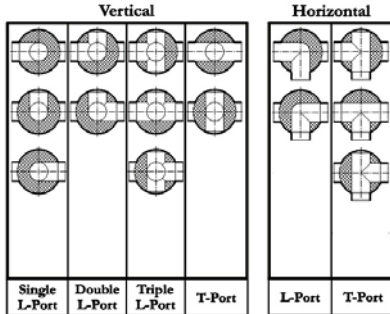

Ball port options viewed from top of valve



Horizontal Diverter Valve



Vertical 3-Way Valve

PVC Horizontal Diverter Ball Valves


Material	EPDM					Viton®					Disc Code
	Joint	Socket	SR Thread	Spigot	Flanged	Socket	SR Thread	Spigot	Flanged		
Size	Ball Port	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	
1/2	L-Port	5022L1-005 97.41	5021L1-005SR 100.56	5027L1-005 97.41	5023L1-005 198.96	5032L1-005 105.66	5031L1-005SR 110.43	5037L1-005 105.66	5033L1-005 207.85	615	
	T-Port	5022T1-005 97.41	5021T1-005SR 100.56	5027T1-005 97.41	5023T1-005 198.96	5032T1-005 105.66	5031T1-005SR 110.43	5037T1-005 105.66	5033T1-005 207.85	615	
3/4	L-Port	5022L1-007 116.18	5021L1-007SR 120.04	5027L1-007 116.18	5023L1-007 208.17	5032L1-007 125.05	5031L1-007SR 128.94	5037L1-007 125.05	5033L1-007 219.68	615	
	T-Port	5022T1-007 116.18	5021T1-007SR 120.04	5027T1-007 116.18	5023T1-007 208.17	5032T1-007 125.05	5031T1-007SR 128.94	5037T1-007 125.05	5033T1-007 219.68	615	
1	L-Port	5022L1-010 140.86	5021L1-010SR 144.65	5027L1-010 140.86	5023L1-010 296.70	5032L1-010 155.18	5031L1-010SR 159.03	5037L1-010 155.18	5033L1-010 324.35	615	
	T-Port	5022T1-010 140.86	5021T1-010SR 144.65	5027T1-010 140.86	5023T1-010 296.70	5032T1-010 155.18	5031T1-010SR 159.03	5037T1-010 155.18	5033T1-010 324.35	615	
1-1/4	L-Port	5022L1-012 163.27	5021L1-012SR 170.65	5027L1-012 163.27	5023L1-012 561.16	5032L1-012 183.65	5031L1-012SR 191.37	5037L1-012 183.65	5033L1-012 594.39	615	
	T-Port	5022T1-012 163.27	5021T1-012SR 170.65	5027T1-012 163.27	5023T1-012 561.16	5032T1-012 183.65	5031T1-012SR 191.37	5037T1-012 183.65	5033T1-012 594.39	615	
1-1/2	L-Port	5022L1-015 190.90	5021L1-015SR 203.24	5027L1-015 190.90	5023L1-015 578.10	5032L1-015 209.00	5031L1-015SR 221.33	5037L1-015 209.00	5033L1-015 604.60	615	
	T-Port	5022T1-015 190.90	5021T1-015SR 203.24	5027T1-015 190.90	5023T1-015 578.10	5032T1-015 209.00	5031T1-015SR 221.33	5037T1-015 209.00	5033T1-015 604.60	615	
2	L-Port	5022L1-020 234.18	5021L1-020SR 246.51	5027L1-020 234.18	5023L1-020 750.72	5032L1-020 273.02	5031L1-020SR 286.41	5037L1-020 273.02	5033L1-020 788.41	615	
	T-Port	5022T1-020 234.18	5021T1-020SR 246.51	5027T1-020 234.18	5023T1-020 750.72	5032T1-020 273.02	5031T1-020SR 286.41	5037T1-020 273.02	5033T1-020 788.41	615	
2-1/2	L-Port	5022L1-025 789.56	5021L1-025SR 824.12	5027L1-025 789.56	5023L1-025 1318.14	5032L1-025 839.60	5031L1-025SR 874.14	5037L1-025 839.60	5033L1-025 1544.72	615	
	T-Port	5022T1-025 789.56	5021T1-025SR 824.12	5027T1-025 789.56	5023T1-025 1318.14	5032T1-025 839.60	5031T1-025SR 874.14	5037T1-025 839.60	5033T1-025 1544.72	615	
3	L-Port	5022L1-030 805.69	5021L1-030SR 841.90	5027L1-030 805.69	5023L1-030 1335.43	5032L1-030 852.76	5031L1-030SR 887.30	5037L1-030 852.76	5033L1-030 1551.81	615	
	T-Port	5022T1-030 805.69	5021T1-030SR 841.90	5027T1-030 805.69	5023T1-030 1335.43	5032T1-030 852.76	5031T1-030SR 887.30	5037T1-030 852.76	5033T1-030 1551.81	615	
4	L-Port	5022L1-040 1459.17	5021L1-040SR 1498.68	5027L1-040 1459.17	5023L1-040 1940.18	5032L1-040 1475.63	5031L1-040SR 1515.13	5037L1-040 1475.63	5033L1-040 2120.71	615	
	T-Port	5022T1-040 1459.17	5021T1-040SR 1498.68	5027T1-040 1459.17	5023T1-040 1940.18	5032T1-040 1475.63	5031T1-040SR 1515.13	5037T1-040 1475.63	5033T1-040 2120.71	615	

Thermoplastic Valves True Union 2000 Industrial 3-Way Ball Valves



Pressure Rating @ 73°F (23°C), Water
 1/2" - 2" 235 psi
 2-1/2" - 4" 150 psi
 Flanged 150 psi
Maximum Service Temperature
 PVC = 140°F (60°C)
 CPVC = 200°F (93°C)
Temperature/Pressure De-ratings Apply
Vertical 3-Way or Horizontal Diverter Design
 (No Branch Shut-off)
 All Standard Carton Quantities are one
 All Valves assembled with Silicone-Free,
 Water Soluble Lubricant
See Ball Valve Accessories & Repair Kits Section
 for Additional Options and Features

Ball Port Options

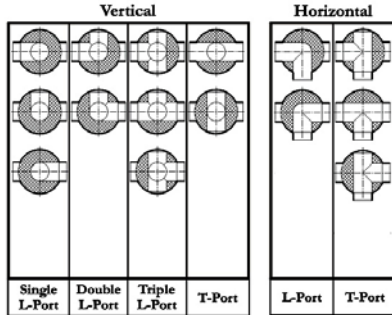

Ball port options viewed from top of valve



Horizontal Diverter Valve



Vertical 3-Way Valve

PVC Horizontal Diverter Ball Valves

Material	EPDM					Viton®					Disc Code
	Joint	Socket	SR Thread	Spigot	Flanged	Socket	SR Thread	Spigot	Flanged		
Size	Ball Port	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each	Part # Price Each		
1/2	L-Port	5022L1-005 97.41	5021L1-005SR 100.56	5027L1-005 97.41	5023L1-005 198.96	5032L1-005 105.66	5031L1-005SR 110.43	5037L1-005 105.66	5033L1-005 207.85	615	
	T-Port	5022T1-005 97.41	5021T1-005SR 100.56	5027T1-005 97.41	5023T1-005 198.96	5032T1-005 105.66	5031T1-005SR 110.43	5037T1-005 105.66	5033T1-005 207.85	615	
3/4	L-Port	5022L1-007 116.18	5021L1-007SR 120.04	5027L1-007 116.18	5023L1-007 208.17	5032L1-007 125.05	5031L1-007SR 128.94	5037L1-007 125.05	5033L1-007 219.68	615	
	T-Port	5022T1-007 116.18	5021T1-007SR 120.04	5027T1-007 116.18	5023T1-007 208.17	5032T1-007 125.05	5031T1-007SR 128.94	5037T1-007 125.05	5033T1-007 219.68	615	
1	L-Port	5022L1-010 140.86	5021L1-010SR 144.65	5027L1-010 140.86	5023L1-010 296.70	5032L1-010 155.18	5031L1-010SR 159.03	5037L1-010 155.18	5033L1-010 324.35	615	
	T-Port	5022T1-010 140.86	5021T1-010SR 144.65	5027T1-010 140.86	5023T1-010 296.70	5032T1-010 155.18	5031T1-010SR 159.03	5037T1-010 155.18	5033T1-010 324.35	615	
1-1/4	L-Port	5022L1-012 163.27	5021L1-012SR 170.65	5027L1-012 163.27	5023L1-012 561.16	5032L1-012 183.65	5031L1-012SR 191.37	5037L1-012 183.65	5033L1-012 594.39	615	
	T-Port	5022T1-012 163.27	5021T1-012SR 170.65	5027T1-012 163.27	5023T1-012 561.16	5032T1-012 183.65	5031T1-012SR 191.37	5037T1-012 183.65	5033T1-012 594.39	615	
1-1/2	L-Port	5022L1-015 190.90	5021L1-015SR 203.24	5027L1-015 190.90	5023L1-015 578.10	5032L1-015 209.00	5031L1-015SR 221.33	5037L1-015 209.00	5033L1-015 604.60	615	
	T-Port	5022T1-015 190.90	5021T1-015SR 203.24	5027T1-015 190.90	5023T1-015 578.10	5032T1-015 209.00	5031T1-015SR 221.33	5037T1-015 209.00	5033T1-015 604.60	615	
2	L-Port	5022L1-020 234.18	5021L1-020SR 246.51	5027L1-020 234.18	5023L1-020 750.72	5032L1-020 273.02	5031L1-020SR 286.41	5037L1-020 273.02	5033L1-020 788.41	615	
	T-Port	5022T1-020 234.18	5021T1-020SR 246.51	5027T1-020 234.18	5023T1-020 750.72	5032T1-020 273.02	5031T1-020SR 286.41	5037T1-020 273.02	5033T1-020 788.41	615	
2-1/2	L-Port	5022L1-025 789.56	5021L1-025SR 824.12	5027L1-025 789.56	5023L1-025 1318.14	5032L1-025 839.60	5031L1-025SR 874.14	5037L1-025 839.60	5033L1-025 1544.72	615	
	T-Port	5022T1-025 789.56	5021T1-025SR 824.12	5027T1-025 789.56	5023T1-025 1318.14	5032T1-025 839.60	5031T1-025SR 874.14	5037T1-025 839.60	5033T1-025 1544.72	615	
3	L-Port	5022L1-030 805.69	5021L1-030SR 841.90	5027L1-030 805.69	5023L1-030 1335.43	5032L1-030 852.76	5031L1-030SR 887.30	5037L1-030 852.76	5033L1-030 1551.81	615	
	T-Port	5022T1-030 805.69	5021T1-030SR 841.90	5027T1-030 805.69	5023T1-030 1335.43	5032T1-030 852.76	5031T1-030SR 887.30	5037T1-030 852.76	5033T1-030 1551.81	615	
4	L-Port	5022L1-040 1459.17	5021L1-040SR 1498.68	5027L1-040 1459.17	5023L1-040 1940.18	5032L1-040 1475.63	5031L1-040SR 1515.13	5037L1-040 1475.63	5033L1-040 2120.71	615	
	T-Port	5022T1-040 1459.17	5021T1-040SR 1498.68	5027T1-040 1459.17	5023T1-040 1940.18	5032T1-040 1475.63	5031T1-040SR 1515.13	5037T1-040 1475.63	5033T1-040 2120.71	615	