



Thermoplastic Valves CWV Ball Valves & Swing Check Ball Valve

CWV Ball Valves



**A Combination of Economy & Quality - Made in the U.S.A.
For Greater Value in a General Purpose Cold Water Valve**

Pressure Rating @ 73°F (23°C), Water = 125 psi

You don't have to go overseas to find an economical general purpose ball valve! Spears® CWV BALL VALVES are produced in the U.S.A. with Spears® high quality construction and NSF® Certified for potable water service. Designed for use with cold water, these PVC valves may be suitable for some applications previously handled by Spears® Utility Valves. Available in IPS sizes 1/2" through 2" with a Full 1-Year Warranty.

CWV PVC Ball Valve

Part Number	Size	Std Pk	Mstr Ctn	Disc Code	Price Each
Socket Ends					
8722-005	1/2	50	0	204	8.01
8722-007	3/4	25	0	204	9.50
8722-010	1	25	0	204	12.92
8722-012	1-1/4	20	0	204	17.13
8722-015	1-1/2	20	0	204	26.14
8722-020	2	10	0	204	33.04

CWV PVC Ball Valve


Part Number	Size	Std Pk	Mstr Ctn	Disc Code	Price Each
Threaded Ends					
8721-005	1/2	50	0	204	9.89
8721-007	3/4	25	0	204	11.73
8721-010	1	25	0	204	15.96
8721-012	1-1/4	20	0	204	21.14
8721-015	1-1/2	20	0	204	32.27
8721-020	2	10	0	204	40.79

Swing Check Ball Valve



- One-piece Combination for Applications Requiring In-line Ball Valve and Check Valves
- Compact, Space-Saving Design
- True Union Design Allows Easy Service and Cleaning
- High Grade EPDM Seals
- Replaceable PTFE HDPE Ball Valve Seats
- Safety-Blocked™ Seal Carrier on Ball Valve
- Replaceable Sealed Check Valve Cartridge
- Suitable for Horizontal or Vertical Up-flow Installations
- Socket End Connections

Pressure Rating @ 73°F (23°C), Water
 Full Flow (open) 150 psi
 Back Pressure (closed) 75 psi
Maximum Service Temperature
 140°F (60°C)
 Temperature/Pressure De-ratings Apply

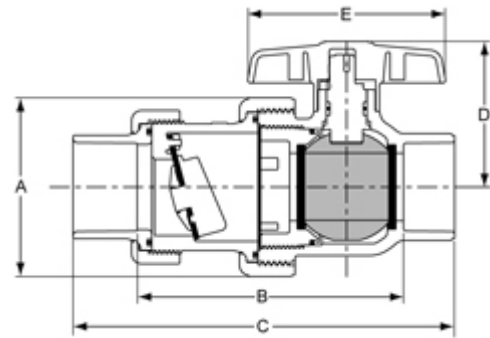

Size	A	B	C	D	E
1-1/2	3-7/8	5-3/4	8-1/4	3-3/16	4-1/4
2	4-7/16	6-11/16	9-3/8	3-7/8	5-1/16

General Installation Information: Swing Check Ball Valves are designed for horizontal installations, but may be installed in up-flow only vertical position. The Check Valve portion **MUST** be installed with the valve's FLOW arrow pointing in the direction of flow and with the designated side up in horizontal installations. Do Not install Check Valve upside down. The Ball Valve portion may be rotated and installed in any position. Flow velocity should not exceed 5 ft./sec. Minimum opening pressure is less than 0.5 psi.

PVC Swing Check Ball Valve

Part Number	Size	Std Pk	Mstr Ctn	Disc Code	Price Each
Soc x Soc					
7622-015	1-1/2	10	0	026	40.44
7622-020	2	6	0	026	58.04