


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

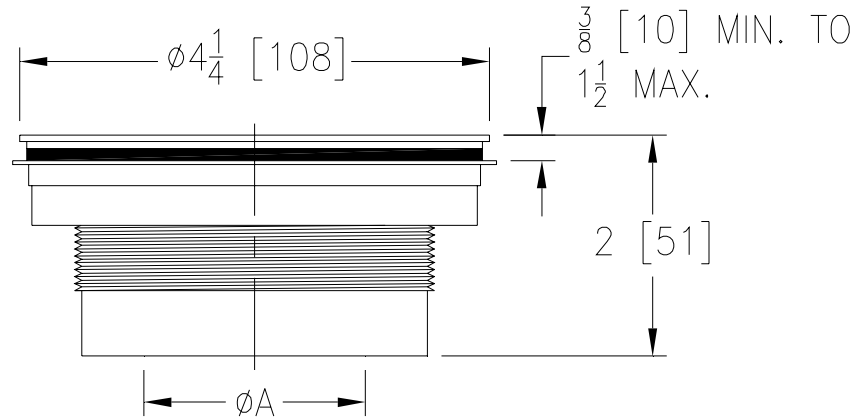

Product	A' Connections	Grate Open Area Sq. In [cm ²]
___ FD2275-PV2	2 [50] PVC Push-On	3 [21]
___ FD2275-AB2	2 [50] ABS Push-On	

FD2275 PVC or ABS No-Caulk Shower Stall Drain
Recommended for molded shower stalls where the drain is installed on the shower unit before it is placed. The drain is furnished with a stainless steel strainer, water-tight gasket and securing nut.

Typical Installation

