


BALL LOCK BOLTS

An essential time-saving fastener.

All Ball Lock Bolts are a time-saving and efficient method of locating and fastening fixture elements to the tabletop without having to reach underneath the table.

Insert the Ball Lock Bolt over the fixturing element and turn the knurled head with your hand for initial positioning.

The Ball Lock Bolt consists of three locking steel balls in the bolt shank that move outward to lock against the bottom chamfer of the table plate, pulling the fixture components securely downward and tightening them in place. Once all the Bolts are positioned, tighten the socket head cap screw top of the Bolts with a light turn of a hex wrench. Ball Lock Bolts release quickly from the Bolt top with a turn of your hex wrench.

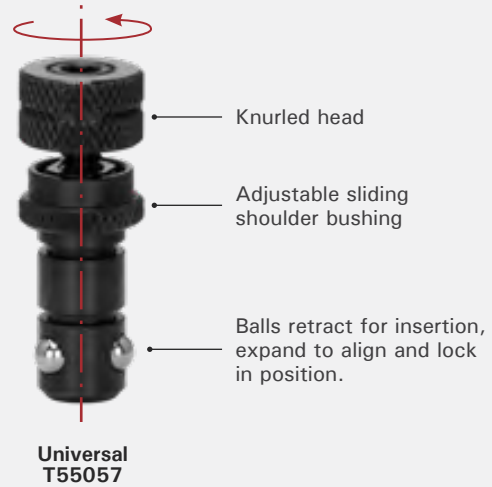

UNIVERSAL BALL LOCK BOLT

The Universal Ball Lock Bolt features an adjustable sliding shoulder bushing, providing better surface contact while also reducing friction when torquing down screws.



Adjustable T55055



Fixed Length T55015



Fixed Length T55010



Flush-Mount T55020 | T55025

Part No.	Type	Description	Capacity (in)	Weight (lb)	Use Hex Wrench	12-pc Bulk Package
T55010	Fixed	For connecting 2 accessories together	0.9	0.2	1/4	T55010-12PPK
T55015		For connecting an accessory to the tabletop	1.1	0.2	1/4	T55015-12PPK
T55020	Flush	For connecting 2 accessories together	0.9	0.1	5/32	-
T55025		For connecting an accessory to the tabletop	1.1	0.1	5/32	-
T55055	Adjustable	Connecting tables to accessories, and accessories to accessories.	0.9 ~ 1.1	0.1	1/4	T55055-12PPK
T55057	Universal	Connecting tables to accessories, and accessories to accessories.	0.9 ~ 1.1	0.2	1/4	T55057-12PPK

